


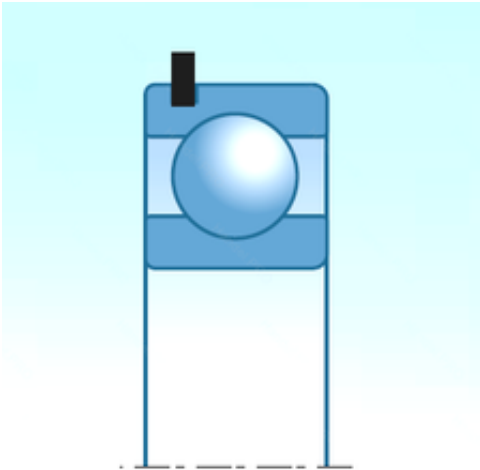

Bearing No. 6014ZZNR

D	110,000 mm
C	20,000 mm
B	20,000 mm
d	70,000 mm
Bore	2.756 Inch 70 Millimeter
Noun	Bearing
UNSPSC	31171504
series:	60
Category	Single Row Ball Bearing
Size (mm)	70x110x20
Enclosure	2 Metal Shields
Snap Ring	Yes
Inventory	0.0
Width (mm)	20,000
bore type:	Round
maximum rpm:	7100 RPM
Weight / LBS	1.33
Cage Material	Steel
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Bearing number	6014ZZNR
bore diameter:	70 mm
overall width:	20 mm
fillet radius:	1.1 mm
cage material:	Steel
Keyword String	Ball
Rolling Element	Ball Bearing
finish/coating:	Uncoated

Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Long Description	70MM Bore; 110MM Outside Diameter; 20MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Outer Race Width	0.787 Inch 20 Millimeter
Outside Diameter	4.331 Inch 110 Millimeter
Weight / Kilogram	0.603
outer ring width:	20 mm
inner ring width:	20 mm
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
outside diameter:	110 mm
precision rating:	ISO Class 0
Bore Diameter (mm)	70,000
Internal Clearance	C0-Medium
Outer Diameter (mm)	110,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	31000 N
maximum rpm (grease):	6100 rpm
dynamic load capacity:	38000 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item	6014ZZNR/2A

Number	
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No