


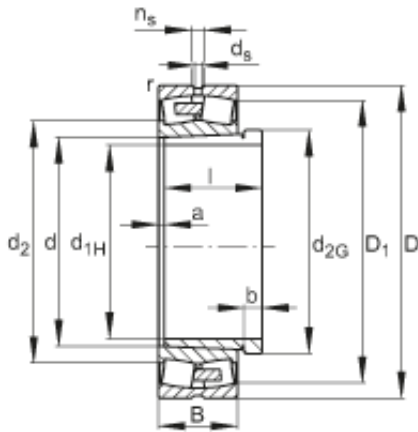

Bearing No. 23076-E1A-K-MB1 + AH3076G-H

l	170 mm
e	0,21
D	560 mm
B	135 mm
a	10 mm
b	31 mm
m	109 kg / Weight
d	380 mm
Size (mm)	360x560x135
Width (mm)	135
d_s	12,5 mm
C_r	2900000 N / Dynamic load rating (radial)
n_s	23,5 mm
D_1	508,1 mm
Y_1	3,17
Y_2	4,72
Y_0	3,1
n_G	1230 1/min / Limiting speed
n_B	750 1/min / Reference speed
m_1	22,1 kg / Weight, withdrawal sleeve
C_{0r}	5000000 N / Static load rating (radial)
Bearing number	23076-E1A-K-MB1 + AH3076G-H
d_{1H}	360 mm
d_{2G}	Tr400X5

C _{ur}	410000 N / Fatigue limit load, radial
r _{min}	5 mm
r _{a max}	4 mm
d _{a min}	398 mm
D _{a max}	542 mm
Bore Diameter (mm)	360
Outer Diameter (mm)	560
- AH3076G-H / Designation, withdrawal sleeve	AH3076GH / Designation, withdrawal sleeve