


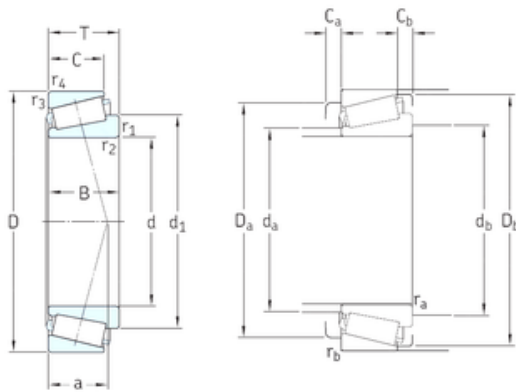

Bearing No. 31306J2/Q

D	72 mm
d	30 mm
T	20,75 mm
B	19 mm
C	14 mm
a	22 mm
d1	52,7 mm
Weight	0,39 Kg
db min	37 mm
Da min	55 mm
da max	40 mm
Ca min.	3 mm
Cb min.	6,5 mm
Db min.	68 mm
Da max.	65 mm
r1 min.	1,5 mm
r4 min.	1,5 mm
r3 min.	1,5 mm
r2 min.	1,5 mm
rb max.	1,5 mm
ra max.	1,5 mm
Size (mm)	30x72x20.75
Width (mm)	20,75
Limiting speed	9500 r/min
Bearing number	31306J2/Q
Reference speed	6700 r/min
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Calculation factor (e)	0,83
Calculation factor (Y)	0,72

Fatigue load limit (Pu)	5,7
Basic dynamic load rating (C)	47,3 kN
Basic static load rating (C0)	50 kN