


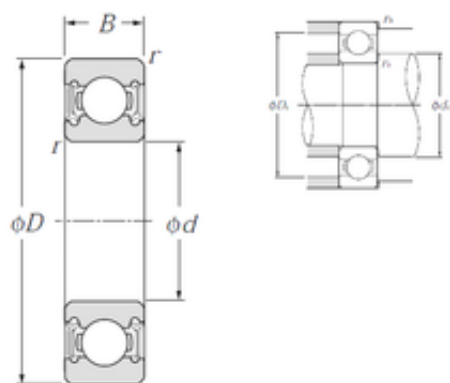

Bearing No. 6015LLU

C	20 mm
d	75 mm
D	115 mm
B	20 mm
Bore	2.953 Inch 75 Millimeter
Noun	Bearing
Weight	0,649 Kg
r min.	1,1 mm
da max	85,5 mm
UNSPSC	31171504
da min.	81,5 mm
Da max.	108,5 mm
ra max.	1 mm
Category	Single Row Ball Bearing
Size (mm)	75x115x20
Snap Ring	No
Inventory	0.0
Enclosure	2 Seals
Width (mm)	20
bore type:	Round
Weight / LBS	1.41
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	75 mm
Keyword String	Ball
overall width:	20 mm
cage material:	Steel

fillet radius:	1.1 mm
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Bearing number	6015LLU
Enclosure Type	Contact Seal
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Reference speed	3 300 r/min
Inner Race Width	0 Inch 0 Millimeter
Long Description	75MM Bore; 115MM Outside Diameter; 20MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	4.528 Inch 115 Millimeter
Outer Race Width	0.787 Inch 20 Millimeter
outside diameter:	115 mm
Manufacturer Name	NTN
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
inner ring width:	20 mm
outer ring width:	20 mm
Weight / Kilogram	0

Bore Diameter (mm)	75
Internal Clearance	C0-Medium
Outer Diameter (mm)	115
snap ring included:	Without Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	33500 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	3300 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	33500 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	33,5 kN
Basic dynamic load rating (C)	39,5 kN
Maximum Capacity / Filling Slot	No