


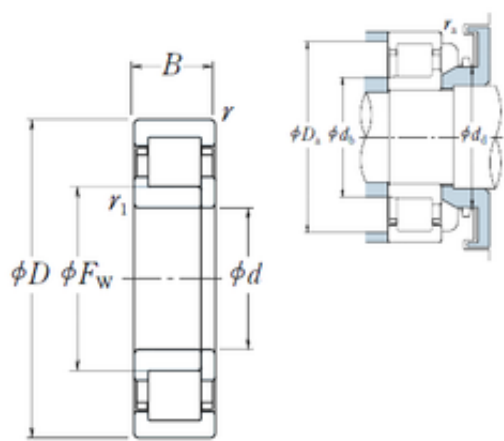

Bearing No. NUP1080

r	5
d	400 mm
D	600 mm
B	90 mm
C	90 mm
B_	90
D_	600
r1	5
Z_	25
Fw	450 mm
da	420
C0	2280
ra	4
rb	4
DA_	50
DE_	550
DI_	450
yobi	NUP1080
SBRG	10
KBRG	4164
SDM_	500
mass	93.3
Db max	580 mm
db max	445
db min	420 mm
r min.	5 mm
C_conv	1360000
Weight	88,2 Kg
ALPHA_	0
LangID	1

dc min	455
D_a max	580
r1 min.	5 mm
da min.	420 mm
db max.	445 mm
TSR rpm	1100
GRS rpm	900
ra max.	4 mm
Oil rpm	1100
rb max.	4 mm
hidYobi	NUP1080
hidTable	ecat_NSCLDR
Size (mm)	400x600x90
Prod_Type3	CRB_SR_NUP
Width (mm)	90
Bearing number	NUP1080
Bore Diameter (mm)	400
Outer Diameter (mm)	600
(Grease) Lubrication Speed	900 r/min
Basic static load rating (C0)	2280 kN
Basic dynamic load rating (C)	1360 kN