




Bearing No. 23088-K-MB+AHX3088G

n	23,5 mm
C	157 mm
b	35 mm
a	11 mm
l	194 mm
d	440 mm
D	650 mm
B	157 mm
d5	12,5 r/min
D1	586,8 mm
d1	420 mm
Weight	207,1 Kg
r min.	6 mm
da min.	463 mm
Da max.	627 mm
ra max.	5 mm
Size (mm)	440x650x157
Width (mm)	157
Thread (G)	Tr460X5
Limiting speed	750 r/min
Bearing number	23088-K-MB+AHX3088G
Reference speed	610 r/min
Bore Diameter (mm)	440
Outer Diameter (mm)	650
Calculation factor (e)	0,24
Fatigue load limit (Pu)	405
Calculation factor (Y0)	2,78
Calculation factor (Y1)	2,84
Basic dynamic load rating (C)	3400 kN

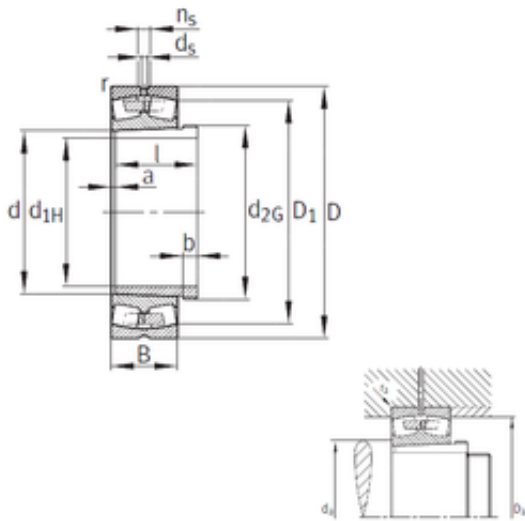

Basic static load rating (C0)	7100 kN
----------------------------------	---------