


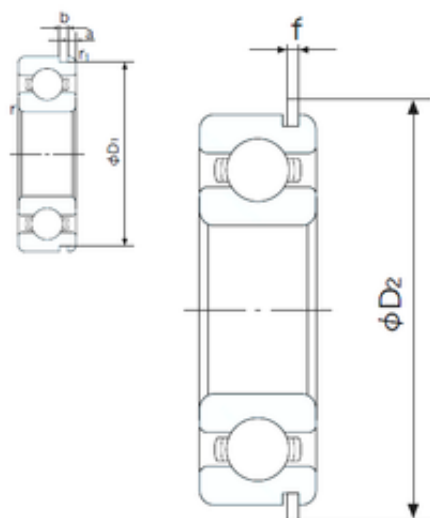

Bearing No. 6015NR

f	2.46 mm
a	2.87 mm
b	2.7 mm
d	75 mm
D	115 mm
B	20 mm
C	20 mm
D2	121.6 mm
D1	111.81 mm
r1	0.5 mm
Width	20 mm
r min.	1.1 mm
Weight	0.615 Kg
r1 min.	0.5 mm
b (min)	2.7 mm
a (max)	2.9 mm
Da (max)	109 mm
Dx (min)	123 mm
ra (max)	1 mm
da (min)	81 mm
D1 (max)	111.8 mm
Cy (max)	5 mm
Factor fo	15.7
Enclosure	Snap Ring Groove with Snap Ring
Bore Size	75 mm
Size (mm)	75x115x20
Bore Type	Cylindrical Bore
Width (mm)	20
Configuration	Single Row

Bearing number	6015NR
Snap Ring Width	2.5 mm
Radial Clearance	0.010 to 0.030 mm
Outside Diameter	115 mm
Static Load Rating	33,500 N
Bore Diameter (mm)	75
Outer Diameter (mm)	115
Dynamic Load Rating	39,500 N
Limiting Speed - Oil	6,700 rpm
Fillet Radius/Chamfer	1.1 mm
Limiting Speed - Grease	5,700 rpm
(Grease) Lubrication Speed	5700 r/min
Snap Ring Outside Diameter	121.6 mm
Basic static load rating (C0)	33,5 kN
Basic dynamic load rating (C)	39,5 kN