


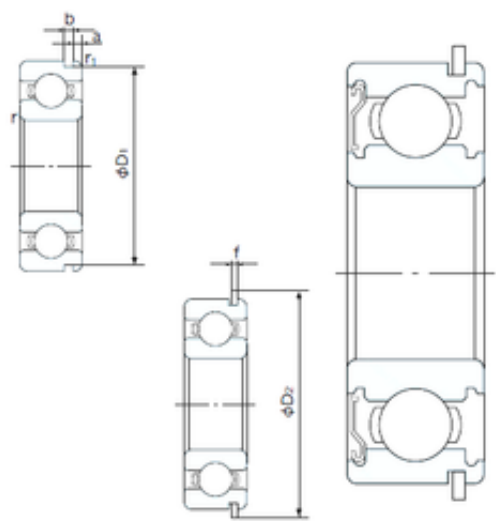

Bearing No. 6015ZENR

b	2.7 mm
d	75 mm
D	115 mm
B	20 mm
C	20 mm
a	2.87 mm
f	2.46 mm
r1	0.5 mm
D1	111.81 mm
D2	121.6 mm
Noun	Bearing
Bore	2.953 Inch 75 Millimeter
Width	20 mm
Weight	0.615 Kg
r min.	1.1 mm
UNSPSC	31171504
a (max)	2.9 mm
r1 min.	0.5 mm
b (min)	2.7 mm
D1 (max)	111.8 mm
Cy (max)	5 mm
Da (max)	109 mm
Category	Single Row Ball Bearing
da (min)	81 mm
Dx (min)	123 mm
ra (max)	1 mm
Inventory	0.0
Factor fo	15.7
Enclosure	1 Metal Shield

Bore Size	75 mm
Snap Ring	Yes
Bore Type	Cylindrical Bore
Size (mm)	75x115x20
Width (mm)	20
Configuration	Single Row
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
Other Features	Deep Groove With Snap Ring
Bearing number	6015ZENR
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Snap Ring Width	2.5 mm
Outer Race Width	0.787 Inch 20 Millimeter
Long Description	75MM Bore; 115MM Outside Diameter; 20MM Outer Race Width; 1 Metal Shield; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Radial Clearance	0.010 to 0.030 mm
Outside Diameter	4.528 Inch 115 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Inner Race Width	0 Inch 0 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0

Bore Diameter (mm)	75
Internal Clearance	C0-Medium
Static Load Rating	33,500 N
Outer Diameter (mm)	115
Dynamic Load Rating	39,500 N
Limiting Speed - Oil	6,700 rpm
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	1.1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	5,700 rpm
Internal Special Features	No
(Grease) Lubrication Speed	5700 r/min
Snap Ring Outside Diameter	121.6 mm
Basic static load rating (C0)	33,5 kN
Basic dynamic load rating (C)	39,5 kN
Maximum Capacity / Filling Slot	No