


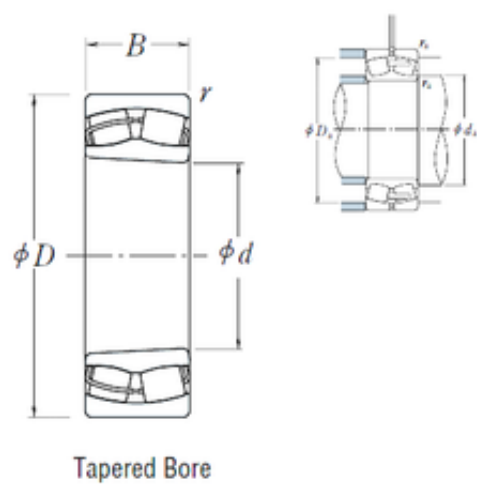

Bearing No. 21304CDKE4

e	0.31
r	1.1
d	20 mm
D	52 mm
B	15 mm
C	15 mm
X1	1
Y3	2.1
X2	0.67
Y0	2.1
Z_	13
Y1	2.1
C0	26.9
X0	1
D_	52
Y2	3.2
ra	1
B_	15
DE_	43.065
DA_	7
SIR	4.5
DI_	29.362
bomp	21304CDKE4
ALP2	50
ALP1	11
ALP3	0
yobi	21304CDKE4
SDM_	36.214
KBRG	2321
SBRG	3

mass	0.17
ALPHA_	0.207
da min	27
r min.	1,1 mm
Weight	0,17 Kg
LangID	1
da max	28 mm
Da min	42 mm
Oil rpm	8200
ra max.	1 mm
D_a max	45
D_a min	42
da min.	27 mm
Da max.	45 mm
hidYobi	21304CDKE4
TSR rpm	10000
GRS rpm	6300
hidTable	ecat_NSSPHR
Macha rpm	0
Size (mm)	20x52x15
Width (mm)	15
Prod_Type3	SRB_CTB_TB
Bearing number	21304CDKE4
Bore Diameter (mm)	20
Outer Diameter (mm)	52
Calculation factor (e)	0,31
(Oil) Lubrication Speed	8200 r/min
Calculation factor (Y0)	2,1
Calculation factor (Y2)	3,2
(Grease) Lubrication Speed	6300 r/min
Basic dynamic load rating (C)	29,3 kN

Basic static load rating (C0)	26,9 kN
----------------------------------	---------