


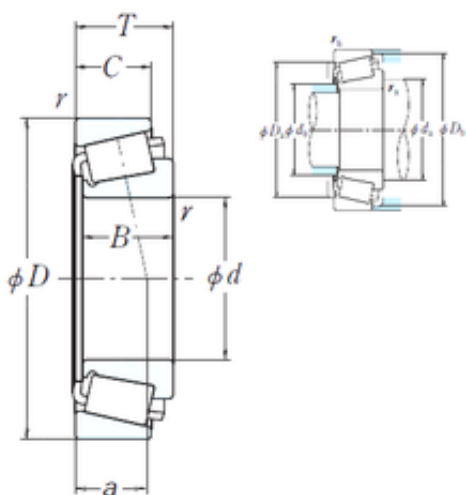

Bearing No. HM266449/HM266410

|                               |                       |
|-------------------------------|-----------------------|
| r                             | 6,4 mm                |
| d                             | 384,175 mm            |
| D                             | 546,1 mm              |
| T                             | 104,775 mm            |
| B                             | 104,775 mm            |
| C                             | 82,55 mm              |
| R                             | 6,4 mm                |
| a                             | 97,5 mm               |
| da                            | 429 mm                |
| Db                            | 531 mm                |
| Da                            | 508 mm                |
| db                            | 407 mm                |
| Weight                        | 76,7 Kg               |
| Size (mm)                     | 384.175x546.1x104.775 |
| Width (mm)                    | 104,775               |
| Bearing number                | HM266449/HM266410     |
| Bore Diameter (mm)            | 384,175               |
| Outer Diameter (mm)           | 546,1                 |
| Calculation factor (e)        | 0,33                  |
| Calculation factor (Y0)       | 0,99                  |
| Basic dynamic load rating (C) | 1840 kN               |
| Basic static load rating (C0) | 4000 kN               |