


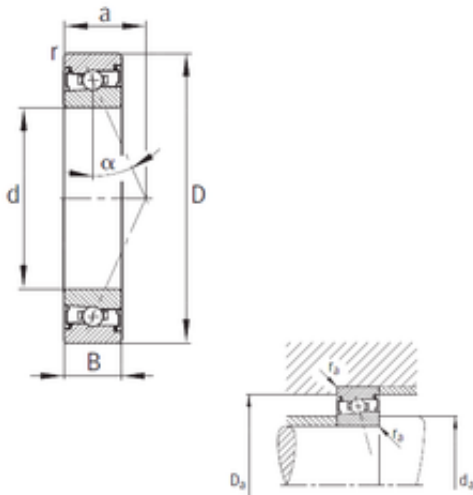

Bearing No. HSS7000-E-T-P4S

m	0,024 kg / Weight
B	8 mm
a	8 mm
C	8 mm
d	10 mm
D	26 mm
Da	22 mm
da	14 mm
r min.	0,3 mm
Weight	0,02 Kg
ra max.	0,3 mm
?	25 ° / Angle
Size (mm)	10x26x8
Width (mm)	8
D _a	22 mm / Tolerance: H12
C _r	2350 N / Dynamic load rating (radial)
d _a	14 mm / Tolerance: h12
C _{0r}	890 N / Static load rating (radial)
Bearing number	HSS7000-E-T-P4S
r _{min}	0,3 mm
Angle (?)	25 °
r _{a max}	0,3 mm
Bore Diameter (mm)	10
n _{G Fett}	85000 1/min / Limiting speed for grease lubrication
Outer Diameter (mm)	26
(Grease) Lubrication Speed	67 000 r/min

Basic static load rating (C0)	1 500 kN
Basic dynamic load rating (C)	2 600 kN