


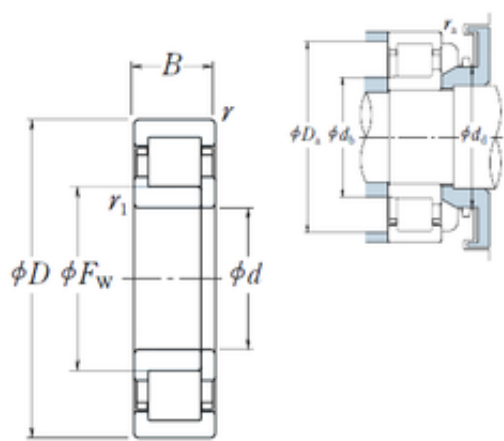

Bearing No. NUP1018

r	1.5
d	90 mm
D	140 mm
B	24 mm
C	24 mm
B_	24
D_	140
r1	1.1
Z_	22
Fw	103 mm
da	98
C0	114
ra	1.5
rb	1
DA_	12
DE_	127
DI_	103
yobi	NUP1018
SBRG	10
KBRG	4164
SDM_	115
mass	1.43
Db max	132 mm
db max	101
db min	96,5 mm
r min.	1,5 mm
C_conv	88000
Weight	1,35 Kg
ALPHA_	0
LangID	1

dc min	106
D_a max	132
r1 min.	1,1 mm
da min.	98 mm
db max.	101 mm
TSR rpm	5300
GRS rpm	4500
ra max.	1,5 mm
Oil rpm	5600
rb max.	1 mm
hidYobi	NUP1018
hidTable	ecat_NSCLDR
Size (mm)	90x140x24
Prod_Type3	CRB_SR_NUP
Width (mm)	24
Bearing number	NUP1018
Bore Diameter (mm)	90
Outer Diameter (mm)	140
(Grease) Lubrication Speed	4 500 r/min
Basic static load rating (C0)	114 kN
Basic dynamic load rating (C)	88 kN