




Bearing No. HM212047/HM212011

|                                 |                   |
|---------------------------------|-------------------|
| R                               | 7,1 mm            |
| d                               | 63,5 mm           |
| D                               | 122,238 mm        |
| T                               | 38,1 mm           |
| B                               | 38,354 mm         |
| C                               | 29,718 mm         |
| r                               | 3,3 mm            |
| Da                              | 116 mm            |
| Ab                              | 3 mm              |
| Aa                              | 2,2 mm            |
| Db                              | 108 mm            |
| da                              | 73 mm             |
| db                              | 87 mm             |
| a -                             | 10,9 mm           |
| Weight                          | 1,95 Kg           |
| Size (mm)                       | 63.5x122.238x38.1 |
| Width (mm)                      | 38,1              |
| Factor (K)                      | 1,73              |
| Factor (G1)                     | 92,2              |
| Factor (Cg)                     | 0,0187            |
| Factor (G2)                     | 18,1              |
| Bearing number                  | HM212047/HM212011 |
| Bore Diameter (mm)              | 63,5              |
| Outer Diameter (mm)             | 122,238           |
| Calculation factor (e)          | 0,34              |
| Basic static load rating (C0)   | 279 kN            |
| Basic dynamic load rating (C1)  | 209 kN            |
| Basic dynamic load rating (C90) | 54,1              |

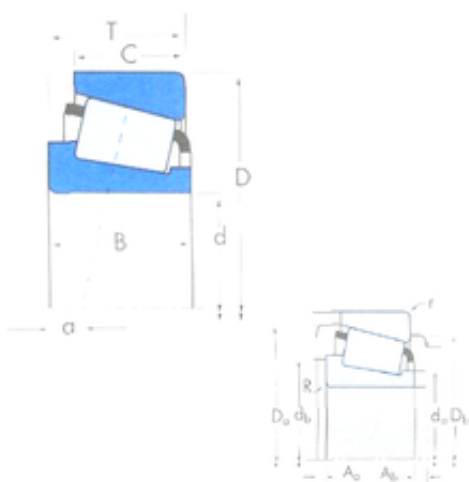

|                                  |      |
|----------------------------------|------|
| Basic dynamic load rating (Ca90) | 31,3 |
|----------------------------------|------|