


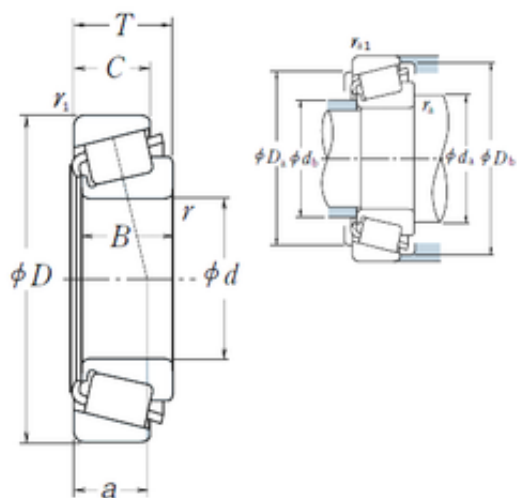

Bearing No. HM212049/HM212011

e	0.34
d	66,675 mm
D	122,238 mm
T	38,1 mm
B	38,354 mm
C	29,718 mm
a	26,9 mm
Da	108 mm
B_	38.354
Db	116 mm
da	81 mm
Y0	0.98
db	74 mm
C0	245
D_	122.238
Z_	17
C_	29.718
Y1	1.8
DE_	107.775
SLR	28
D_a	108
DI_	78.291
DA1	15.843
DA2	14.14
CUP	0.598
DA_	14.996
D_b	116
RAr	259.404
SDM_	93.09
KBRG	3161

yobi	HM212049/HM212011
CONE	1.25
ALP21	25
ALP22	22
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	30
r min.	3,5 mm
LangID	1
Weight	1,848 Kg
ALPHA_	12.683
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	4000
outer r	3.3
hidYobi	HM212049/HM212011
GRS rpm	3000
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	66.675x122.238x38.1
SHOG_yobi	HM212049R/HM212011 R
Prod_Type3	TRBSR_ID_A
Width (mm)	38,1
Bearing number	HM212049/HM212011
Bore Diameter (mm)	66,675
Outer Diameter (mm)	122,238
Calculation factor (e)	0,34

(Oil) Lubrication Speed	4000 r/min
Calculation factor (Y0)	0,98
(Grease) Lubrication Speed	3000 r/min
Basic static load rating (C0)	245 kN
Basic dynamic load rating (C)	188 kN