


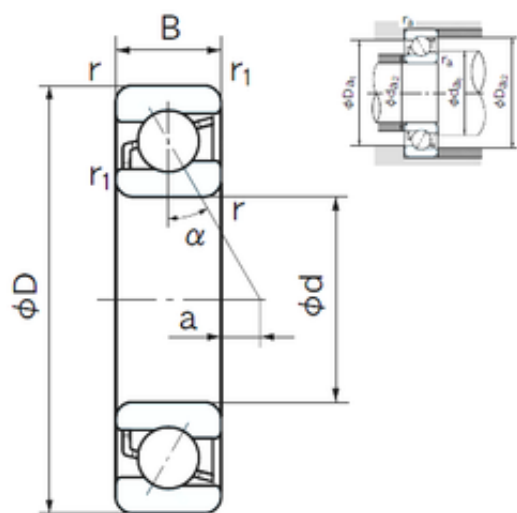

Bearing No. 7008

D	68 mm
d	40 mm
B	15 mm
C	15 mm
a	8.2 mm
r1	0.6 mm
Width	15 mm
Weight	0.210 Kg
r min.	1 mm
ra max.	1 mm
Da max.	63 mm
da min.	45 mm
r1 min.	0.6 mm
ra (max)	1 mm
Da1 (max)	63 mm
Da2 (max)	65 mm
da2 (min)	45 mm
da1 (min)	45 mm
Size (mm)	40x68x15
Enclosure	Open
Bore Type	Cylindrical Bore
Bore Size	40 mm
ra1 (max)	0.6 mm
Width (mm)	15
Configuration	Single Row
Bearing number	7008
Angle (?)	30 °
Outside Diameter	68 mm
Static Load Rating	14,500 N
Bore Diameter (mm)	40

Dynamic Load Rating	18,800 N
Outer Diameter (mm)	68
Limiting Speed - Oil	11,000 rpm
Fillet Radius/Chamfer	1 mm
Limiting Speed - Grease	8,500 rpm
(Grease) Lubrication Speed	8500 r/min
Basic static load rating (C0)	14,5 kN
Basic dynamic load rating (C)	18,8 kN