




Bearing No. 230SM410-MA

	H3088HG / Adapter sleeve
d	410 mm
D	650 mm
C	157 mm
B	225 mm
m	222 kg / Weight
e	0,21
Size (mm)	410x650x157
Width (mm)	157
Y_0	3,13
M_a	120 Nm / Tightening torque per clamping screw
M_i	295 Nm / Tightening torque per clamping screw
n_G	370 1/min / Limiting speed
C_r	3100000 N / Dynamic load rating (radial)
Y_2	4,77
Y_1	3,2
C_{0r}	5850000 N / Static load rating (radial)
C_{ur}	425000 N / Fatigue limit load, radial
Bearing number	230SM410-MA
r_{min}	5 mm
$F_{a max}$	60000 N / Permissible axial load, for inner ring without axial abutment
Bore Diameter (mm)	410

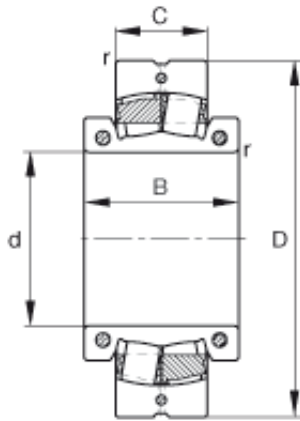

Outer Diameter (mm)	650
---------------------	-----