


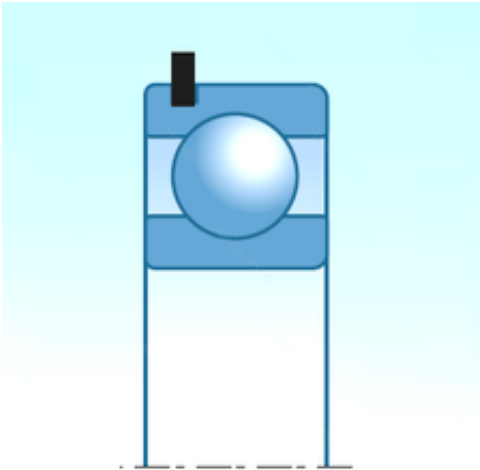

Bearing No. 6016ZZNR

D	125,000 mm
C	22,000 mm
B	22,000 mm
d	80,000 mm
Bore	3.15 Inch 80 Millimeter
Noun	Bearing
UNSPSC	31171504
series:	60
Category	Single Row Ball Bearing
Size (mm)	80x125x22
Enclosure	2 Metal Shields
Snap Ring	Yes
Inventory	0.0
Width (mm)	22,000
bore type:	Round
maximum rpm:	6200 RPM
Weight / LBS	1.87
Cage Material	Steel
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Bearing number	6016ZZNR
bore diameter:	80 mm
overall width:	22 mm
fillet radius:	1.1 mm
cage material:	Steel
Keyword String	Ball
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0

Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	4.921 Inch 125 Millimeter
Outer Race Width	0.866 Inch 22 Millimeter
Long Description	80MM Bore; 125MM Outside Diameter; 22MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Weight / Kilogram	0.893
outer ring width:	22 mm
inner ring width:	22 mm
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
outside diameter:	125 mm
precision rating:	ISO Class 0
Bore Diameter (mm)	80,000
Internal Clearance	C0-Medium
Outer Diameter (mm)	125,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	40000 N
maximum rpm (grease):	5300 rpm
dynamic load capacity:	47500 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6016ZZNR/2A

Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No