




Bearing No. 230S.607-MA

	H3038.607
e	0,23
m	24,4 kg / Weight
d	6 7/16 inch
D	280 mm
C	74 mm
B	123 mm
Size (mm)	163.513x280x74
Width (mm)	74
SNP3036.607	Designation, adapter sleeve, US design
C _r	640000 N / Dynamic load rating (radial)
Y ₁	2,98
Y ₂	4,44
Y ₀	2,92
n _G	970 1/min / Limiting speed
M _i	69 Nm / Tightening torque per clamping screw
M _a	14 Nm / Tightening torque per clamping screw
C _{0r}	1000000 N / Static load rating (radial)
C _{ur}	96000 N / Fatigue limit load, radial
Bearing number	230S.607-MA
r _{min}	2,1 mm
F _{a max}	22200 N / Permissible axial load, for inner ring without axial abutment

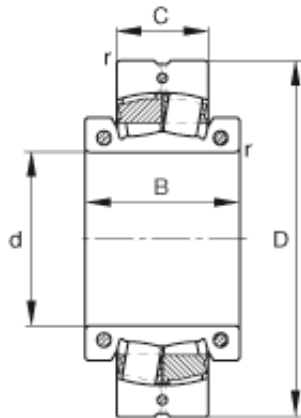

Bore Diameter (mm)	163,513
Outer Diameter (mm)	280