


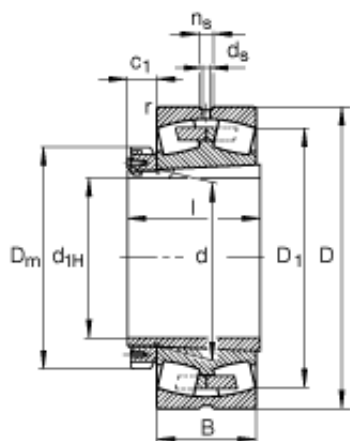

Bearing No. 23168-B-K-MB + H3168-HG

d	340 mm
l	254 mm
D	580 mm
B	190 mm
c	55 mm
m	210 kg / Weight
e	0,34
Size (mm)	320x580x190
Width (mm)	190
n_B	570000 N / Fatigue limit load, radial
C_r	3650000 N / Dynamic load rating (radial)
n_s	23,5 mm
d_s	12,5 mm
D_1	499,4 mm
D_m	440 mm
Y_1	1,98
c_1	70 mm
Y_2	2,94
Y_0	1,93
n_G	1080 1/min / Limiting speed
m_1	50,1 kg
C_{0r}	6950000 N / Static load rating (radial)
Bearing number	23168-B-K-MB + H3168-HG
d_{1H}	320 mm
r_{min}	5 mm

$r_{a \max}$	4 mm
$d_{a \max}$	395 mm
$D_{a \max}$	560 mm
$B_{a \min}$	14 mm
$d_{b \min}$	360 mm
Bore Diameter (mm)	320
Outer Diameter (mm)	580
- H3168-HG / Adapter sleeve	H3168HG / Adapter sleeve