




Bearing No. 23168-B-K-MB+AH3168G

n	23,5 mm
C	190 mm
b	33 mm
a	9 mm
l	225 mm
d	340 mm
D	580 mm
B	190 mm
d5	12,5 r/min
D1	499,5 mm
d1	320 mm
Weight	230,6 Kg
r min.	5 mm
da min.	360 mm
Da max.	560 mm
ra max.	4 mm
Size (mm)	340x580x190
Width (mm)	190
Thread (G)	Tr360X5
Limiting speed	900 r/min
Bearing number	23168-B-K-MB+AH3168G
Reference speed	590 r/min
Bore Diameter (mm)	340
Outer Diameter (mm)	580
Calculation factor (e)	0,34
Fatigue load limit (Pu)	570
Calculation factor (Y0)	1,93
Calculation factor (Y1)	1,98
Basic dynamic load rating (C)	3650 kN

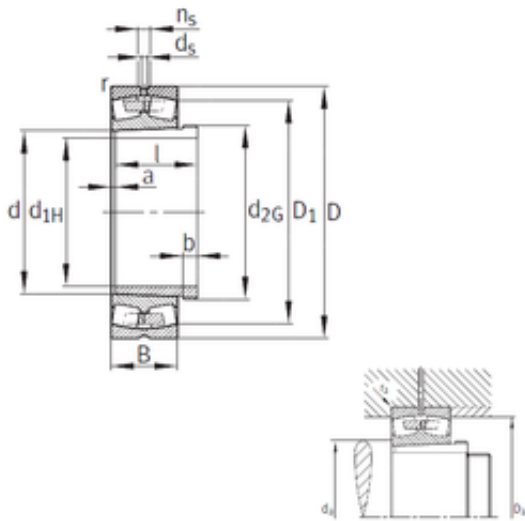

Loyal | 23168-B-K-MB+AH3168G

Basic static load rating (C0)	6950 kN
----------------------------------	---------