


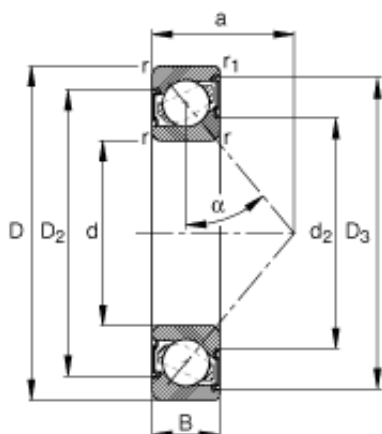

Bearing No. 7008-B-2RS-TVP

D	68 mm
d	40 mm
B	15 mm
a	30 mm
m	0,17 kg / Weight
?	40 ° / Angle
Size (mm)	40x68x15
Width (mm)	15
n_G	5300 1/min / Limiting speed
D_2	59,4 mm
D_3	64,9 mm
C_r	28000 N / Dynamic load rating (radial)
d_2	48,8 mm
Bearing number	7008-B-2RS-TVP
C_{Or}	20300 N / Static load rating (radial)
C_{ur}	1370 N / Fatigue limit load, radial
r_{min}	1 mm
$r_{a \max}$	1 mm
$r_{1 \min}$	0,6 mm
$d_{a \min}$	44,6 mm
$D_{a \max}$	63,4 mm
$D_{b \max}$	64,8 mm
$r_{a1 \max}$	0,6 mm
Bore Diameter (mm)	40
Outer Diameter (mm)	68