


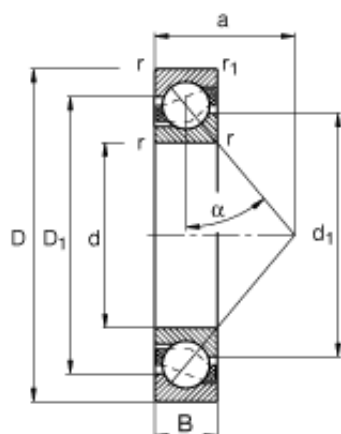

Bearing No. 7008-B-TVP

D	68 mm
d	40 mm
B	15 mm
a	30 mm
m	0,17 kg / Weight
?	40 ° / Angle
Size (mm)	40x68x15
Width (mm)	15
n_B	1/min / Reference speed
n_G	12100 1/min / Limiting speed
C_r	28000 N / Dynamic load rating (radial)
d_1	51,3 mm
D_1	58,6 mm
C_{0r}	20300 N / Static load rating (radial)
Bearing number	7008-B-TVP
r_{min}	1 mm
$D_{b \max}$	64,8 mm
$d_{a \min}$	44,6 mm
$r_{1 \min}$	0,6 mm
$r_{a \max}$	1 mm
$D_{a \max}$	63,4 mm
$r_{a1 \max}$	0,6 mm
Bore Diameter (mm)	40
Outer Diameter (mm)	68