


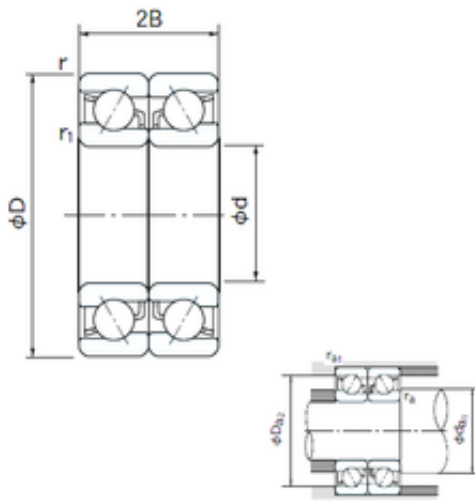

**Bearing No. 7008CDB**

|                    |                  |
|--------------------|------------------|
| C                  | 15 mm            |
| d                  | 40 mm            |
| B                  | 15 mm            |
| D                  | 68 mm            |
| r1                 | 0.6 mm           |
| 2B                 | 30 mm            |
| a -                | 1.3 mm           |
| Width              | 15 mm            |
| r min.             | 1 mm             |
| Weight             | 0.210 Kg         |
| ra max.            | 0.6 mm           |
| r1 min.            | 0.6 mm           |
| da min.            | 45 mm            |
| Da max.            | 65 mm            |
| ra (max)           | 1 mm             |
| da1 (min)          | 45 mm            |
| Bore Size          | 40 mm            |
| Enclosure          | Open             |
| Bore Type          | Cylindrical Bore |
| ra1 (max)          | 0.6 mm           |
| Size (mm)          | 40x68x15         |
| da2 (min)          | 45 mm            |
| Da2 (max)          | 65 mm            |
| Da1 (max)          | 63 mm            |
| Width (mm)         | 15               |
| Configuration      | Duplex           |
| Bearing number     | 7008CDB          |
| Angle (?)          | 15 °             |
| Outside Diameter   | 68 mm            |
| Static Load Rating | 32,000 N         |
|                    |                  |

|                               |             |
|-------------------------------|-------------|
| Bore Diameter (mm)            | 40          |
| Dynamic Load Rating           | 33,500 N    |
| Outer Diameter (mm)           | 68          |
| Limiting Speed - Oil          | 16,000 rpm  |
| Fillet Radius/Chamfer         | 1 mm        |
| Limiting Speed - Grease       | 12,000 rpm  |
| (Grease) Lubrication Speed    | 12000 r/min |
| Basic dynamic load rating (C) | 33,5 kN     |
| Basic static load rating (C0) | 32 kN       |