


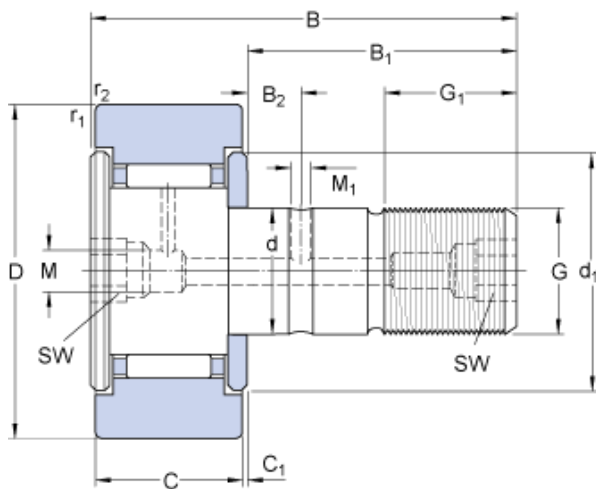

Bearing No. KR 62 XB

G	M 24x1.5
M	8 mm
D	62 mm
d	24 mm
B	80 mm
C	29 mm
SW	14 mm
Size (mm)	24x62x80
Width (mm)	80
B_1	49.5 mm
B_2	11 mm
C_1	0.8 mm
d_1	44 mm
G_1	25 mm
M_1	4 mm
Hexagonal nut	M 24x1.5
M_1	4 mm
G_1	25 mm
d_1	44 mm
C_1	0.8 mm
B_2	11 mm
B_1	49.5 mm
Grease fitting	NIP A3x9.5
Limiting speed	2400 r/min
Bearing number	KR 62 XB
Mass cam follower	0.79 kg
Bore Diameter (mm)	24
Lubrication adapter	AP 14
Mass support roller	0.79 kg

Outer Diameter (mm)	62
$r_{1,2}$ min.	1 mm
$r_{1,2}$ - min.	1 mm
Basic dynamic load rating C	24.6 kN
Basic dynamic load rating - C	24.6 kN
Recommended tightening torque	220 N·m
Fatigue load limit P_u	5.5 kN
Fatigue load limit - P_u	5.5 kN
Basic static load rating C_0	44 kN
Basic static load rating - C_0	44 kN
Maximum static radial loads - F_{0r}	85 kN
Maximum dynamic radial loads - F_r	58.5 kN
Maximum dynamic radial loads F_r max.	58.5 kN
Maximum static radial loads F_{0r} max.	85 kN