


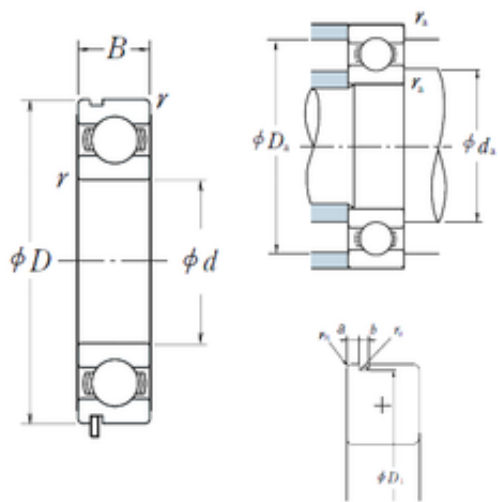

Bearing No. 6017N

a	2,87 mm
r	1.1
d	85 mm
D	130 mm
B	22 mm
C	22 mm
b	3,1 mm
fo	15.8
B_	22
ra	1
C0	43
D1	125,22 mm
D_	130
Z_	15
rn	0,5 mm
ro	0.6
DE_	120.994
SRI	6.98
D_a	123.5
DA_	13.494
SRE	6.98
DI_	94.006
yobi	6017N
mass	0.918
SBRG	10
bomp	0
KBRG	6101
SREX	0.025
SREN	-0.025
SRIN	-0.025

SDM_	107.5
SRIX	0.025
ALPHA_	0
r min.	1,1 mm
C_conv	49500
da max	96 mm
da min	91.5
Weight	0,918 Kg
LangID	1
ra max.	1 mm
Da max.	123,5 mm
Oil rpm	6000
da min.	91,5 mm
r0 max.	0,6 mm
hidYobi	6017N
GRS rpm	5000
hidTable	ecat_NSRDGB
Size (mm)	85x130x22
Prod_Type3	DGBB_SR_N_OT
Width (mm)	22
Bearing number	6017N
Bore Diameter (mm)	85
Outer Diameter (mm)	130
(Oil) Lubrication Speed	6 000 r/min
(Grease) Lubrication Speed	5 000 r/min
Basic dynamic load rating (C)	49,5 kN
Basic static load rating (C0)	43 kN