


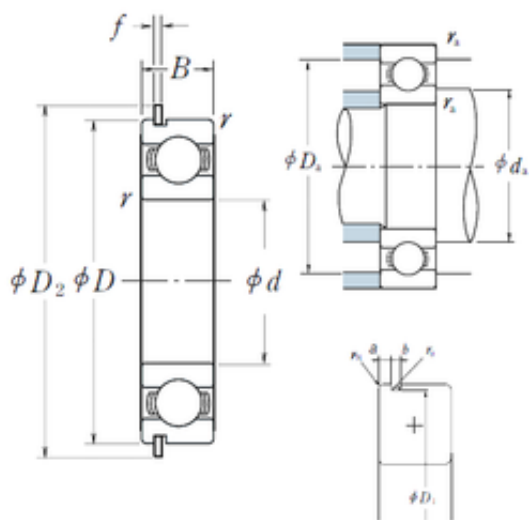

Bearing No. 6017NR

f	2,82 mm
r	1.1
d	85 mm
D	130 mm
B	22 mm
C	22 mm
a	2,87 mm
b	3,1 mm
D1	125,22 mm
fo	15.8
C0	43
ra	1
D2	139,7 mm
Z_	15
Cy	5.3
Dx	141.5
rn	0,5 mm
B_	22
D_	130
ro	0.6
SRE	6.98
D_a	123.5
DE_	120.994
DA_	13.494
DI_	94.006
SRI	6.98
bomp	0
SREN	-0.025
SBRG	10
KBRG	6101

SREX	0.025
Bore	3.346 Inch 85 Millimeter
mass	0.918
SRIX	0.025
SRIN	-0.025
Noun	Bearing
yobi	6017NR
SDM_	107.5
C_conv	49500
r min.	1,1 mm
LangID	1
da max	96 mm
UNSPSC	31171504
da min	91.5
Weight	0,918 Kg
ALPHA_	0
hidYobi	6017NR
r0 max.	0,6 mm
GRS rpm	5000
da min.	91,5 mm
Da max.	123,5 mm
ra max.	1 mm
Oil rpm	6000
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	85x130x22
Enclosure	Open
Inventory	0.0
Snap Ring	Yes
Width (mm)	22
bore type:	Round
Prod_Type3	DGBB_SR_NR_OT

Weight / LBS	0.91
closure type:	Open
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
bore diameter:	85 mm
Keyword String	Ball
Bearing number	6017NR
overall width:	22 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Outer Race Width	0.866 Inch 22 Millimeter
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	5.118 Inch 130 Millimeter
Long Description	85MM Bore; 130MM Outside Diameter; 22MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Weight / Kilogram	0.91
Manufacturer Name	NSK
outside diameter:	130 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	85
Outer Diameter (mm)	130
internal clearance:	C3
snap ring included:	With Snap Ring
Minimum Buy Quantity	N/A

row type & fill slot:	Single Row Non-Fill Slot
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	6 000 r/min
Manufacturer Item Number	6017NR
Internal Special Features	No
(Grease) Lubrication Speed	5 000 r/min
Basic static load rating (C0)	43 kN
Basic dynamic load rating (C)	49,5 kN
Maximum Capacity / Filling Slot	No