


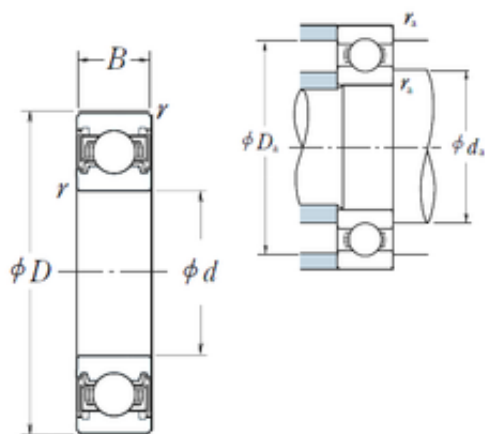

Bearing No. 6017VV

D	130 mm
d	85 mm
B	22 mm
C	22 mm
r	1.1
Z_	15
B_	22
D_	130
ra	1
C0	43
fo	15.8
DI_	94.006
SRI	6.98
D_a	123.5
DE_	120.994
DA_	13.494
SRE	6.98
SRIN	-0.025
SBRG	10
yobi	6017VV
SDM_	107.5
SREX	0.025
KBRG	6151
bomp	0
mass	0.918
Bore	3.346 Inch 85 Millimeter
SRIX	0.025
SREN	-0.025
Noun	Bearing

ALPHA_	0
da min	91.5
LangID	1
r min.	1,1 mm
UNSPSC	31171504
C_conv	49500
da max	96 mm
Weight	0,918 Kg
hidYobi	6017VV
Da max.	123,5 mm
da min.	91,5 mm
ra max.	1 mm
GRS rpm	5000
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	85x130x22
Width (mm)	22
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.91
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6017VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	5.118 Inch 130 Millimeter
Outer Race Width	0.866 Inch 22

	Millimeter
Long Description	85MM Bore; 130MM Outside Diameter; 22MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.91
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	85
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6017VV
Internal Special Features	No
(Grease) Lubrication Speed	5 000 r/min
Basic static load rating (C0)	43 kN
Basic dynamic load rating (C)	49,5 kN
Maximum Capacity / Filling Slot	No