


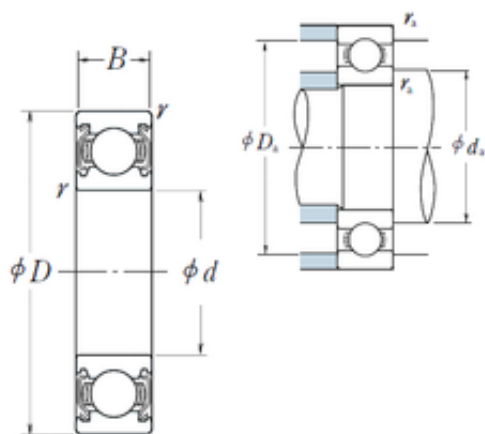

Bearing No. 6017ZZ

D	130 mm
d	85 mm
B	22 mm
C	22 mm
r	1.1
C0	43
fo	15.8
ra	1
D_	130
B_	22
Z_	15
DI_	94.006
D_a	123.5
DE_	120.994
SRI	6.98
DA_	13.494
SRE	6.98
SRIN	-0.025
SREN	-0.025
SDM_	107.5
Noun	Bearing
yobi	6017ZZ
SBRG	10
mass	0.918
Bore	3.346 Inch 85 Millimeter
bomp	0
SREX	0.025
KBRG	6141
SRIX	0.025

UNSPSC	31171504
ALPHA_	0
LangID	1
r min.	1,1 mm
da max	96 mm
da min	91.5
Weight	0,918 Kg
C_conv	49500
GRS rpm	5000
hidYobi	6017ZZ
da min.	91,5 mm
Da max.	123,5 mm
ra max.	1 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Snap Ring	No
Size (mm)	85x130x22
Enclosure	2 Metal Shields
bore type:	Round
Prod_Type3	DGBB_SR_ZZ
Width (mm)	22
Weight / LBS	0.92
Product Group	B00308
closure type:	Double Shielded
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6017ZZ
Keyword String	Ball
overall width:	22 mm
bore diameter:	85 mm
Rolling Element	Ball Bearing

Precision Class	ABEC 1 ISO P0
Outer Race Width	0.866 Inch 22 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	85MM Bore; 130MM Outside Diameter; 22MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	5.118 Inch 130 Millimeter
bearing material:	Steel
Manufacturer Name	NSK
outside diameter:	130 mm
Weight / Kilogram	0.89
Internal Clearance	C0-Medium
maximum rpm (oil):	7100 rpm
Bore Diameter (mm)	85
internal clearance:	C0
Outer Diameter (mm)	130
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
maximum rpm (grease):	6000 rpm
manufacturer catalog:	Click here
static load capacity:	9700 lbs
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	11700 lbs
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6017ZZ
manufacturer upc	029176013263

number:	
Internal Special Features	No
(Grease) Lubrication Speed	5 000 r/min
Basic static load rating (C0)	43 kN
Basic dynamic load rating (C)	49,5 kN
Maximum Capacity / Filling Slot	No