


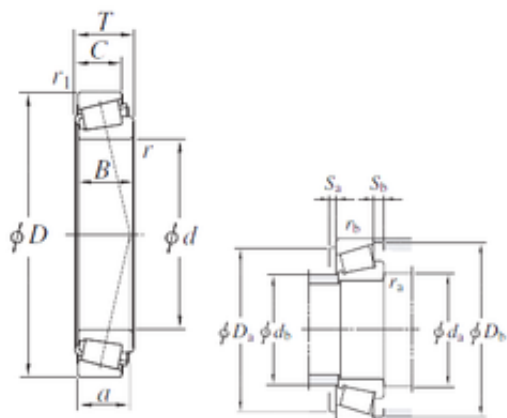

Bearing No. 31330JR

a	100,1 mm
C	50 mm
e	0.83
d	150 mm
D	320 mm
T	82 mm
B	75 mm
Cu	110
Db	301 mm
Cr	952
Y1	0.73
Y0	0.40
C0r	989
a(mm)	100.1
r(min)	5
r min.	5 mm
Weight	28 Kg
da max	179 mm
Da min	272 mm
Da(min)	272
da(min)	172
r1(min)	4
Sb(min)	27
db(max)	179
Da(max)	302
Sa(min)	9
rb max.	3 mm
ra(max)	4
rb(max)	3
Db(min)	301

ra max.	4 mm
Db min.	301 mm
db max.	179 mm
Da max.	302 mm
da min.	172 mm
r2 min.	4 mm
r1 min.	4 mm
Oil lub.	1400
Size (mm)	150x320x82
Width (mm)	82
Bearing No.	31330JR
Grease lub.	980
Bearing number	31330JR
(Refer.)Mass(kg)	28.0
Bore Diameter (mm)	150
Outer Diameter (mm)	320
Calculation factor (e)	0,83
Calculation factor (Y0)	0,4
(Oil) Lubrication Speed	1400 r/min
(Grease) Lubrication Speed	980 r/min
Basic static load rating (C0)	989 kN
Basic dynamic load rating (C)	763 kN