




Bearing No. 231/600-K-MB+AH31/600A

n	23,5 mm
C	300 mm
b	55 mm
a	14 mm
l	355 mm
d	600 mm
D	980 mm
B	300 mm
d5	12,5 r/min
D1	852,6 mm
d1	570 mm
Weight	1019 Kg
r min.	7,5 mm
da min.	632 mm
Da max.	948 mm
ra max.	6 mm
Size (mm)	600x980x300
Width (mm)	300
Thread (G)	Tr630X6
Limiting speed	500 r/min
Bearing number	231/600-K-MB+AH31/600A
Reference speed	270 r/min
Bore Diameter (mm)	600
Outer Diameter (mm)	980
Calculation factor (e)	0,31
Fatigue load limit (Pu)	810
Calculation factor (Y0)	2,15
Calculation factor (Y1)	2,2
Basic dynamic load rating (C)	9000 kN

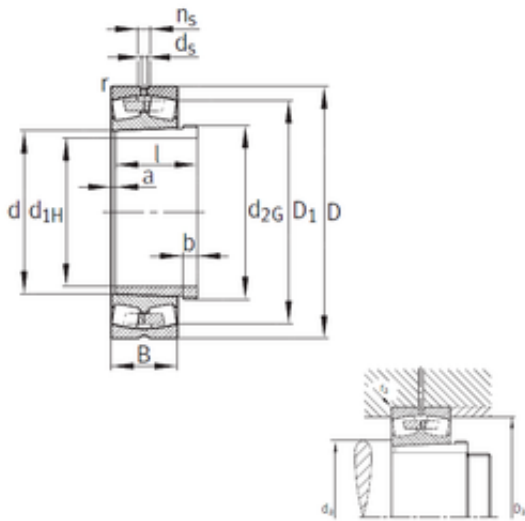

Loyal | 231/600-K-MB+AH31/600A

Basic static load rating (C0)	19300 kN
----------------------------------	----------