


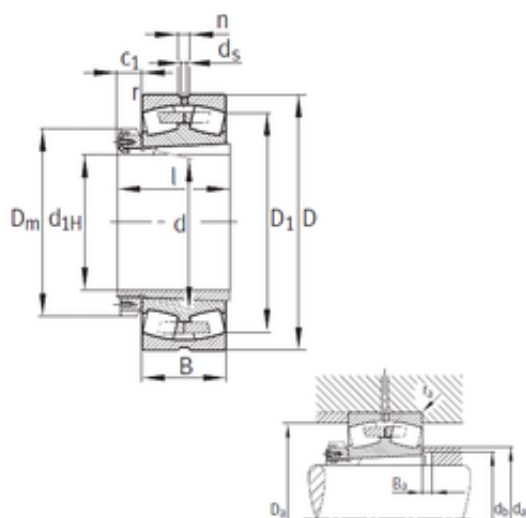

Bearing No. 231/600-K-MB+H31/600

|                         |                      |
|-------------------------|----------------------|
| C                       | 300 mm               |
| l                       | 399 mm               |
| n                       | 23,5 mm              |
| d                       | 600 mm               |
| D                       | 980 mm               |
| B                       | 300 mm               |
| D1                      | 852,6 mm             |
| C1                      | 107 mm               |
| d5                      | 12,5 r/min           |
| Dm                      | 750 mm               |
| d1                      | 560 mm               |
| Weight                  | 1134 Kg              |
| r min.                  | 7,5 mm               |
| da max                  | 693 mm               |
| db min                  | 629 mm               |
| ba min.                 | 20 mm                |
| Da max.                 | 948 mm               |
| ra max.                 | 6 mm                 |
| Size (mm)               | 600x980x300          |
| Width (mm)              | 300                  |
| Limiting speed          | 500 r/min            |
| Bearing number          | 231/600-K-MB+H31/600 |
| Reference speed         | 270 r/min            |
| Bore Diameter (mm)      | 600                  |
| Outer Diameter (mm)     | 980                  |
| Calculation factor (e)  | 0,31                 |
| Fatigue load limit (Pu) | 810                  |
| Calculation factor (Y0) | 2,15                 |
| Calculation factor (Y1) | 2,2                  |
| Basic dynamic load      | 9000 kN              |

|                               |          |
|-------------------------------|----------|
| rating (C)                    |          |
| Basic static load rating (C0) | 19300 kN |