


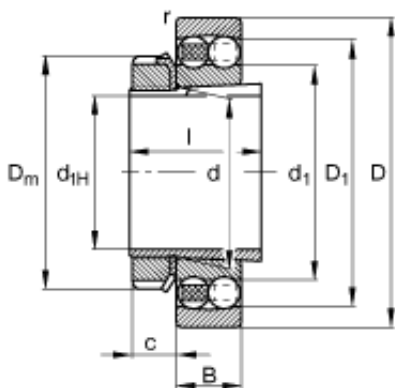

Bearing No. 2318-K-M-C3 + H2318

	H2318 / Adapter sleeve
d	90 mm
m	8,6 kg / Weight
e	0,39
D	190 mm
B	64 mm
l	86 mm
c	18 mm
Size (mm)	80x190x64
Width (mm)	64
m_1	1,71 kg / Weight, adapter sleeve
Y_1	1,63
d_1	115,7 mm
Y_2	2,53
D_m	120 mm
C_r	156000 N / Dynamic load rating (radial)
D_1	161 mm
Y_0	1,71
n_G	5000 1/min / Limiting speed
n_B	5900 1/min / Reference speed
C_{0r}	57000 N / Static load rating (radial)
Bearing number	2318-K-M-C3 + H2318
C_{ur}	3000 N / Fatigue limit load, radial
d_{1H}	80 mm
$r_{a \max}$	2,5 mm

$d_{b \text{ min}}$	100 mm
$D_{a \text{ max}}$	176 mm
$B_{a \text{ min}}$	6 mm
$d_{a \text{ max}}$	104 mm
Bore Diameter (mm)	80
Outer Diameter (mm)	190