


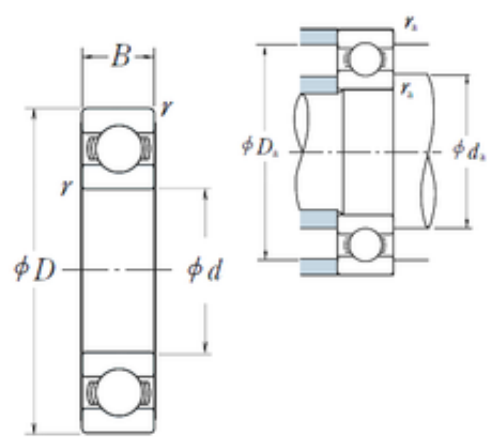

Bearing No. 16008

D	68 mm
d	40 mm
B	9 mm
C	9 mm
r	0.3
Z_	15
D_	68
B_	9
ra	0.3
C0	9.65
fo	16
DI_	47.65
SRE	3.29
D_a	66
DE_	60.35
DA_	6.35
SRI	3.29
SREN	-0.02
yobi	16008
SBRG	0
bomp	0
SREX	0.02
KBRG	6101
SDM_	54
mass	0.13
Bore	1.575 Inch 40 Millimeter
SRIX	0.02
Noun	Bearing
SRIN	-0.02

UNSPSC	31171504
LangID	1
da min	42
r min.	0,3 mm
C_conv	12600
ALPHA_	0
Weight	0,13 Kg
Da max.	66 mm
GRS rpm	10000
hidYobi	16008
Oil rpm	12000
series:	160
ra max.	0,3 mm
da min.	42 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	40x68x9
Snap Ring	No
Enclosure	Open
Inventory	0.0
Width (mm)	9
Prod_Type3	DGBB_SR_OT
bore type:	Round
Weight / LBS	0.265
maximum rpm:	12000 RPM
Cage Material	Steel
Inch - Metric	Metric
closure type:	Open
Product Group	B00308
Bearing number	16008
Keyword String	Ball
fillet radius:	0.3 mm

cage material:	Steel
overall width:	9 mm
bore diameter:	40 mm
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	40MM Bore; 68MM Outside Diameter; 9MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.354 Inch 9 Millimeter
Outside Diameter	2.677 Inch 68 Millimeter
Manufacturer URL	http://www.nskamericas.com
Manufacturer Name	NSK
Weight / Kilogram	0.12
outside diameter:	68 mm
precision rating:	Not Rated
outer ring width:	9 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
Outer Diameter (mm)	68
internal clearance:	C0
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	9650 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	12600 N
(Oil) Lubrication Speed	12 000 r/min
Internal Special	No

Features	
(Grease) Lubrication Speed	10 000 r/min
Basic static load rating (C0)	9,65 kN
Basic dynamic load rating (C)	12,6 kN
Maximum Capacity / Filling Slot	No