


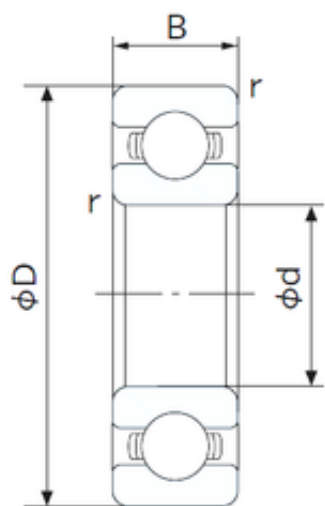

Bearing No. 6019

D	145 mm
d	95 mm
B	24 mm
C	24 mm
Noun	Bearing
Bore	3.74 Inch 95 Millimeter
Width	24 mm
UNSPSC	31171504
r min.	1.5 mm
Weight	1.22 Kg
da min.	102 mm
Da max.	138 mm
ra max.	1.5 mm
Category	Single Row Ball Bearing
ra (max)	1.5 mm
da (min)	102 mm
Da (max)	138 mm
Bore Size	95 mm
Factor fo	15.8
Inventory	0.0
Bore Type	Cylindrical Bore
Enclosure	Open
Snap Ring	No
Size (mm)	95x145x24
Width (mm)	24
Inch - Metric	Metric
Configuration	Single Row
Product Group	B00308
Cage Material	Steel
Keyword String	Ball

Other Features	Deep Groove
Bearing number	6019
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	95MM Bore; 145MM Outside Diameter; 24MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Outside Diameter	5.709 Inch 145 Millimeter
Radial Clearance	0.012 to 0.036 mm
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Outer Race Width	0.945 Inch 24 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	54,000 N
Bore Diameter (mm)	95
Dynamic Load Rating	60,500 N
Outer Diameter (mm)	145
Minimum Buy Quantity	N/A
Limiting Speed - Oil	5,300 rpm
Fillet Radius/Chamfer	1.5 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	4,500 rpm
Internal Special Features	No

(Grease) Lubrication Speed	4500 r/min
Basic static load rating (C0)	54 kN
Basic dynamic load rating (C)	60,5 kN
Maximum Capacity / Filling Slot	No