


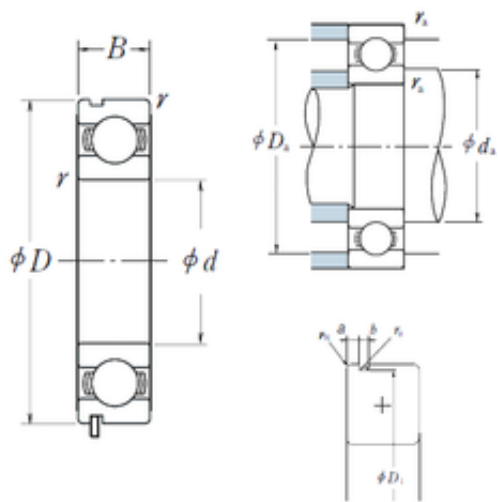

Bearing No. 6019N

a	3,71 mm
r	1.5
d	95 mm
D	145 mm
B	24 mm
C	24 mm
b	3,1 mm
fo	15.8
B_	24
ra	1.5
C0	54
D1	140,23 mm
D_	145
Z_	15
rn	0,5 mm
ro	0.6
DE_	136.581
SRI	7.8
D_a	137
DA_	15.081
SRE	7.8
DI_	106.419
yobi	6019N
mass	1.23
SBRG	10
bomp	0
KBRG	6101
SREX	0.03
SREN	-0.03
SRIN	-0.03

SDM_	121.5
SRIX	0.03
ALPHA_	0
r min.	1,5 mm
C_conv	60500
da max	108,5 mm
da min	103
Weight	1,23 Kg
LangID	1
ra max.	1,5 mm
Da max.	137 mm
Oil rpm	5300
da min.	103 mm
r0 max.	0,6 mm
hidYobi	6019N
GRS rpm	4500
hidTable	ecat_NSRDGB
Size (mm)	95x145x24
Prod_Type3	DGBB_SR_N_OT
Width (mm)	24
Bearing number	6019N
Bore Diameter (mm)	95
Outer Diameter (mm)	145
(Oil) Lubrication Speed	5 300 r/min
(Grease) Lubrication Speed	4 500 r/min
Basic dynamic load rating (C)	60,5 kN
Basic static load rating (C0)	54 kN