


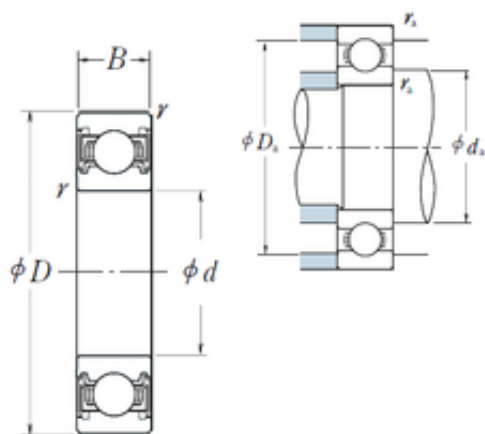

Bearing No. 6019VV

r	1.5
d	95 mm
D	145 mm
B	24 mm
C	24 mm
fo	15.8
D_	145
B_	24
ra	1.5
Z_	15
C0	54
DI_	106.419
SRE	7.8
D_a	137
DE_	136.581
SRI	7.8
DA_	15.081
SREN	-0.03
Bore	3.74 Inch 95 Millimeter
SRIN	-0.03
bomp	0
SRIX	0.03
yobi	6019VV
mass	1.23
SDM_	121.5
KBRG	6151
SREX	0.03
SBRG	10
Noun	Bearing
da max	108,5 mm

LangID	1
r min.	1,5 mm
da min	103
ALPHA_	0
C_conv	60500
UNSPSC	31171504
Weight	1,23 Kg
ra max.	1,5 mm
da min.	103 mm
hidYobi	6019VV
GRS rpm	4500
Da max.	137 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Enclosure	2 Seals
Size (mm)	95x145x24
Inventory	0.0
Prod_Type3	DGBB_SR_VV
Width (mm)	24
Weight / LBS	2.7122
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6019VV
Enclosure Type	Non-Contact Seal
Other Features	Deep Groove Rubber Seal
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	5.709 Inch 145 Millimeter

Outer Race Width	0.945 Inch 24 Millimeter
Long Description	95MM Bore; 145MM Outside Diameter; 24MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	1.23
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	95
Outer Diameter (mm)	145
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	4 500 r/min
Basic dynamic load rating (C)	60,5 kN
Basic static load rating (C0)	54 kN
Maximum Capacity / Filling Slot	No