


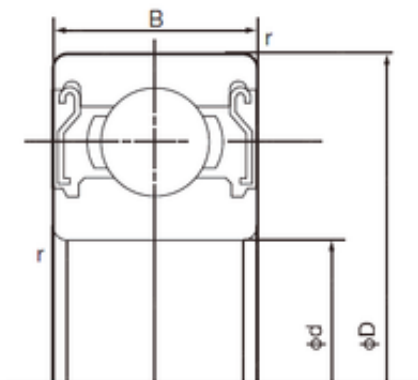

Bearing No. 6019ZZ

D	145 mm
d	95 mm
B	24 mm
C	24 mm
Noun	Bearing
Bore	3.74 Inch 95 Millimeter
Width	24 mm
UNSPSC	31171504
r min.	1.5 mm
Weight	1.22 Kg
da min.	102 mm
Da max.	138 mm
ra max.	1.5 mm
Category	Single Row Ball Bearing
ra (max)	1.5 mm
Da (max)	138 mm
da (min)	102 mm
Factor fo	15.8
Inventory	0.0
Bore Size	95 mm
Bore Type	Cylindrical Bore
Enclosure	2 Metal Shields
Snap Ring	No
Size (mm)	95x145x24
Width (mm)	24
Configuration	Single Row
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Other Features	Deep Groove

Keyword String	Ball
Bearing number	6019ZZ
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	95MM Bore; 145MM Outside Diameter; 24MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Manufacturer URL	http://www.nachiamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.945 Inch 24 Millimeter
Outside Diameter	5.709 Inch 145 Millimeter
Radial Clearance	0.012 to 0.036 mm
Weight / Kilogram	0
Manufacturer Name	NACHI
Bore Diameter (mm)	95
Internal Clearance	C0-Medium
Static Load Rating	54,000 N
Dynamic Load Rating	60,500 N
Outer Diameter (mm)	145
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	1.5 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	4,500 rpm
Internal Special Features	No
Basic dynamic load	60,5 kN

rating (C)	
Basic static load rating (C0)	54 kN
Maximum Capacity / Filling Slot	No