


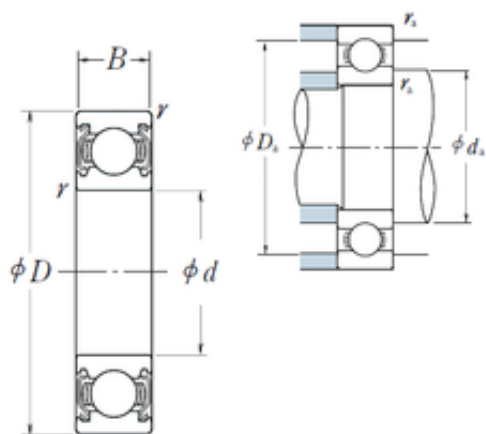

Bearing No. 6019ZZ

r	1.5
d	95 mm
D	145 mm
B	24 mm
C	24 mm
fo	15.8
D_	145
B_	24
ra	1.5
Z_	15
C0	54
DI_	106.419
SRE	7.8
D_a	137
DE_	136.581
SRI	7.8
DA_	15.081
SREN	-0.03
Bore	3.74 Inch 95 Millimeter
SRIN	-0.03
bomp	0
SRIX	0.03
yobi	6019ZZ
mass	1.23
SDM_	121.5
KBRG	6141
SREX	0.03
SBRG	10
Noun	Bearing
Weight	1,23 Kg

LangID	1
da max	108,5 mm
C_conv	60500
da min	103
ALPHA_	0
r min.	1,5 mm
UNSPSC	31171504
ra max.	1,5 mm
Da max.	137 mm
hidYobi	6019ZZ
da min.	103 mm
GRS rpm	4500
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Inventory	0.0
Enclosure	2 Metal Shields
Size (mm)	95x145x24
Width (mm)	24
Prod_Type3	DGBB_SR_ZZ
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
Bearing number	6019ZZ
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.945 Inch 24 Millimeter
Outside Diameter	5.709 Inch 145 Millimeter
Manufacturer URL	http://www.nskamericas.com

Long Description	95MM Bore; 145MM Outside Diameter; 24MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Weight / Kilogram	1.235
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	95
Outer Diameter (mm)	145
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	4 500 r/min
Basic dynamic load rating (C)	60,5 kN
Basic static load rating (C0)	54 kN
Maximum Capacity / Filling Slot	No