


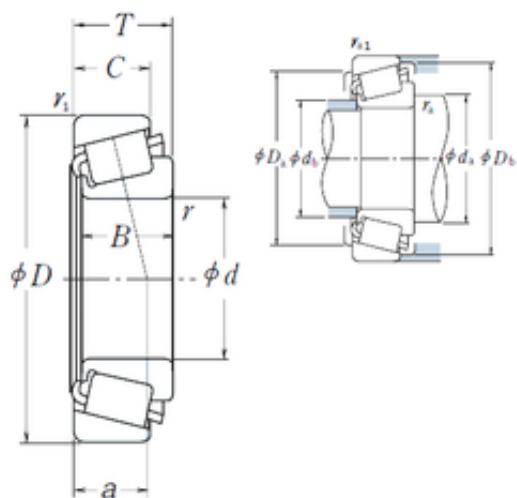

Bearing No. HH221449/HH221410

D	190,5 mm
d	101,6 mm
T	57,15 mm
B	57,531 mm
C	46,038 mm
e	0.33
a	42,3 mm
D_	190.5
db	116 mm
Y1	1.8
B_	57.531
Db	179 mm
da	131 mm
Y0	0.99
C0	520
Da	171 mm
Z_	15
C_	46.038
RAr	408.178
CUP	2.24
DA_	23.628
DA2	22.314
DA1	24.929
SLR	43
DE_	168.277
D_a	171
D_b	179
DI_	121.995
KBRG	3161
CONE	4.55

SDM_	145.354
yobi	HH221449/HH221410
BET23	0
BET21	3
ALP23	0
BET22	30
ALP22	10
ALP21	25
BETA_	1
Weight	6,79 Kg
ALPHA_	12.583
r min.	8 mm
LangID	1
hidYobi	HH221449/HH221410
Oil rpm	2600
inner r	8
r1 min.	3,3 mm
ra max.	8 mm
outer r	3.3
GRS rpm	1900
outer rb	3.3
inner ra	8
hidTable	ecat_NSTPRI
Category	Bearings
ra1 max.	3,3 mm
Size (mm)	101.6x190.5x57.15
SHOG_yobi	HH221449/HH221410
Inventory	0.0
Width (mm)	57,15
Prod_Type3	TRBSR_ID_A
Product Group	B00308
Bearing number	HH221449/HH221410

Manufacturer Name	NSK
Weight / Kilogram	0
Bore Diameter (mm)	101,6
Outer Diameter (mm)	190,5
Minimum Buy Quantity	N/A
Calculation factor (e)	0,33
(Oil) Lubrication Speed	2600 r/min
Calculation factor (Y0)	0,99
(Grease) Lubrication Speed	1900 r/min
Basic dynamic load rating (C)	390 kN
Basic static load rating (C0)	520 kN