


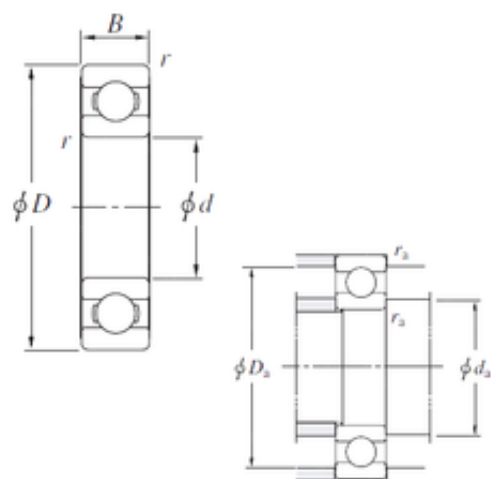

Bearing No. 6020

D	150 mm
d	100 mm
B	24 mm
C	24 mm
f0	15.9
Cu	2.70
Cr	75.2
C0r	54.2
Bore	3.937 Inch 100 Millimeter
Noun	Bearing
UNSPSC	31171504
Weight	1,25 Kg
r(min)	1.5
r min.	1,5 mm
da min.	108 mm
ra(max)	1.5
Da max.	142 mm
Da(max)	142
da(min)	108
ra max.	1,5 mm
Category	Single Row Ball Bearing
Oil lub.	5100
Inventory	0.0
Enclosure	Open
Size (mm)	100x150x24
Snap Ring	No
Width (mm)	24
Grease lub.	4300
Bearing No.	6020

Weight / LBS	2.976
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Keyword String	Ball
Bearing number	6020
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	5.906 Inch 150 Millimeter
Long Description	100MM Bore; 150MM Outside Diameter; 24MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.945 Inch 24 Millimeter
(Refer.)Mass(kg)	1.25
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	1.351
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	100
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	5100 r/min
Manufacturer Item Number	6020
Internal Special Features	No
(Grease) Lubrication Speed	4300 r/min

Basic static load rating (C0)	54,2 kN
Basic dynamic load rating (C)	60,2 kN
Maximum Capacity / Filling Slot	No