


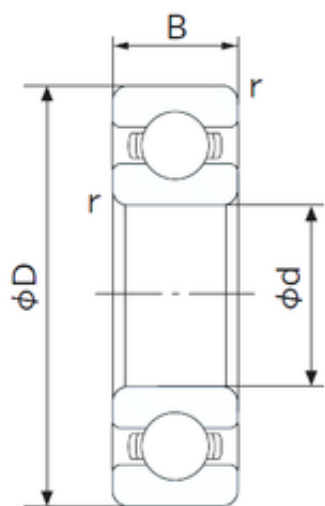

Bearing No. 6020

D	150 mm
d	100 mm
B	24 mm
C	24 mm
Noun	Bearing
Bore	3.937 Inch 100 Millimeter
Width	24 mm
UNSPSC	31171504
r min.	1.5 mm
Weight	1.26 Kg
da min.	107 mm
Da max.	143 mm
ra max.	1.5 mm
Category	Single Row Ball Bearing
ra (max)	1.5 mm
da (min)	107 mm
Da (max)	143 mm
Bore Size	100 mm
Factor fo	15.9
Inventory	0.0
Bore Type	Cylindrical Bore
Enclosure	Open
Snap Ring	No
Size (mm)	100x150x24
Width (mm)	24
Inch - Metric	Metric
Configuration	Single Row
Product Group	B00308
Cage Material	Steel

Keyword String	Ball
Other Features	Deep Groove
Bearing number	6020
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	100MM Bore; 150MM Outside Diameter; 24MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Outside Diameter	5.906 Inch 150 Millimeter
Radial Clearance	0.012 to 0.036 mm
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Outer Race Width	0.945 Inch 24 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	54,000 N
Bore Diameter (mm)	100
Dynamic Load Rating	60,000 N
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
Limiting Speed - Oil	5,300 rpm
Fillet Radius/Chamfer	1.5 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	4,300 rpm
Internal Special	No

Features	
(Grease) Lubrication Speed	4200 r/min
Basic static load rating (C0)	54 kN
Basic dynamic load rating (C)	60 kN
Maximum Capacity / Filling Slot	No