


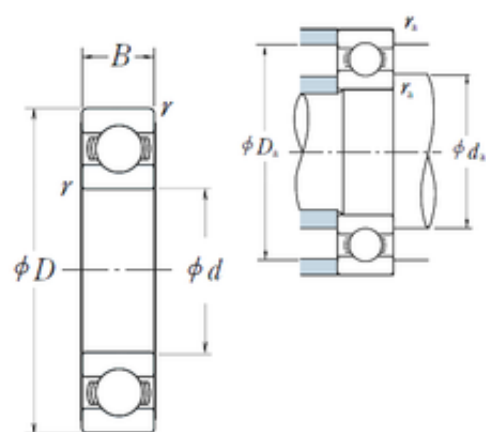

Bearing No. 6020

r	1.5
d	100 mm
D	150 mm
B	24 mm
C	24 mm
ra	1.5
C0	54
fo	15.9
B_	24
D_	150
Z_	15
DI_	109.919
D_a	142
DE_	140.081
DA_	15.081
SRE	7.8
SRI	7.8
SDM_	125
SREN	-0.03
mass	1.29
Bore	3.937 Inch 100 Millimeter
SBRG	10
SRIX	0.03
KBRG	6101
Noun	Bearing
SRIN	-0.03
bomp	0
SREX	0.03
yobi	6020

UNSPSC	31171504
C_conv	60000
Weight	1,29 Kg
da max	112,5 mm
LangID	1
da min	108
r min.	1,5 mm
ALPHA_	0
ra max.	1,5 mm
Oil rpm	5300
Da max.	142 mm
hidYobi	6020
GRS rpm	4300
series:	60
da min.	108 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Snap Ring	No
Size (mm)	100x150x24
Enclosure	Open
Inventory	0.0
bore type:	Round
Prod_Type3	DGBB_SR_OT
Width (mm)	24
Weight / LBS	1.27
maximum rpm:	5300 RPM
Inch - Metric	Metric
Cage Material	Steel
closure type:	Open
Product Group	B00308
Bearing number	6020
fillet radius:	1.5 mm

cage material:	Steel
overall width:	24 mm
bore diameter:	100 mm
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Outside Diameter	5.906 Inch 150 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	100MM Bore; 150MM Outside Diameter; 24MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.945 Inch 24 Millimeter
Manufacturer Name	NSK
Weight / Kilogram	1.3
precision rating:	Not Rated
outside diameter:	150 mm
outer ring width:	24 mm
Bore Diameter (mm)	100
Internal Clearance	C0-Medium
internal clearance:	C0
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	54000 N
dynamic load capacity:	60000 N
Harmonized Tariff Code	8482.10.50.68

(Oil) Lubrication Speed	5 300 r/min
Manufacturer Item Number	6020
Internal Special Features	No
(Grease) Lubrication Speed	4 300 r/min
Basic static load rating (C0)	54 kN
Basic dynamic load rating (C)	60 kN
Maximum Capacity / Filling Slot	No