


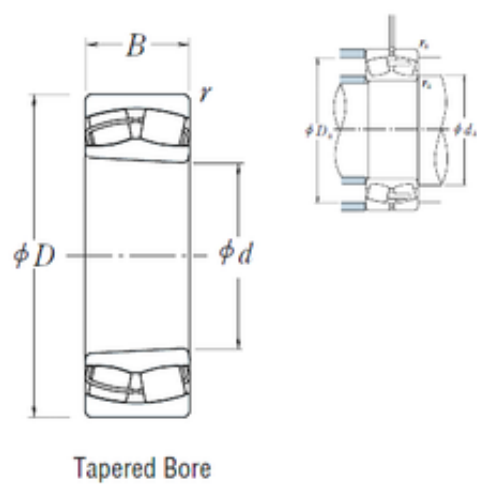

Bearing No. 23140CKE4

e	0.31
r	3
d	200 mm
D	340 mm
B	112 mm
C	112 mm
Y0	2.1
C0	2330
X2	0.67
X1	1
X0	1
Y3	2.2
ra	2.5
Z_	21
Y1	2.1
D_	340
Y2	3.2
B_	112
DE_	305.554
SIR	45
DA_	34
DI_	238.959
ALP3	0
yobi	23140CKE4
SBRG	31
KBRG	2322
Bore	7.874 Inch 200 Millimeter
SDM_	272.257
mass	42.6

Noun	Bearing
bomp	23140CKE4
ALP1	11
ALP2	40
Width	4.409 Inch 112 Millimeter
Da min	293 mm
r min.	3 mm
LangID	1
ALPHA_	0.204
Weight	42,7 Kg
da min	214
UNSPSC	31171510
da max	232 mm
hidYobi	23140CKE4
da min.	214 mm
GRS rpm	800
D_a min	293
TSR rpm	1500
Da max.	326 mm
ra max.	2,5 mm
D_a max	326
Oil rpm	1000
Category	Spherical Roller Bearing
hidTable	ecat_NSSPHR
Size (mm)	200x340x112
Inventory	0.0
Enclosure	Open
Macha rpm	0
Prod_Type3	SRB_CTB_TB
Width (mm)	112
Weight / LBS	50
Bore Profile	Tapered

Inch - Metric	Metric
Cage Material	Steel
Product Group	B04311
Bearing number	23140CKE4
Keyword String	Spherical
Other Features	Order adapter or withdrawal sleeve or nut separately. Others may be available
Relubricatable	Yes
Rolling Element	Spherical Roller Bearing
Mounting Method	Adapter Mount
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	13.386 Inch 340 Millimeter
Long Description	200MM Tapered Bore; 340MM Outside Diameter; 112MM Width; C0-Medium Clearance; Adapter Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable; Adapter Part
Manufacturer Name	NSK
Weight / Kilogram	45
Withdrawal Sleeve	AH3140 (Specify bore)
Internal Clearance	C0-Medium
Bore Diameter (mm)	200
Outer Diameter (mm)	340
Adapter Part Number	SNW3140 H3140 HA3140 (Specify bore) Inch H3140 (Specify bore) Millimeter

Minimum Buy Quantity	N/A
Harmonized Tariff Code	84823080
Calculation factor (e)	0,31
Calculation factor (Y2)	3,2
Calculation factor (Y0)	2,1
(Oil) Lubrication Speed	1000 r/min
Manufacturer Item Number	23140CKE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	800 r/min
Basic static load rating (C0)	2330 kN
Basic dynamic load rating (C)	1360 kN