


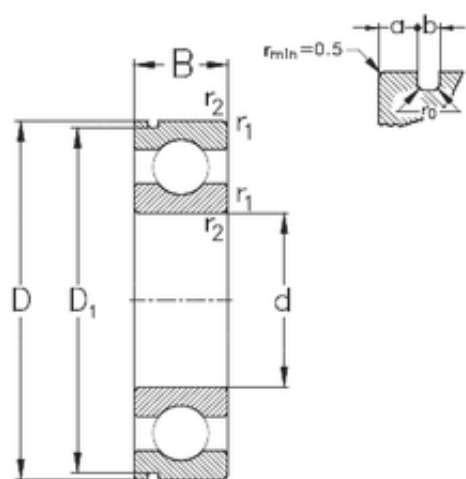

Bearing No. 6020-N

|                               |            |
|-------------------------------|------------|
| a                             | 4,9 mm     |
| d                             | 100 mm     |
| D                             | 150 mm     |
| B                             | 24 mm      |
| C                             | 24 mm      |
| b                             | 3,1 mm     |
| f                             | 2,82 mm    |
| D1                            | 145,24 mm  |
| D2                            | 159,7 mm   |
| Weight                        | 1,26 Kg    |
| r1 min.                       | 1,5 mm     |
| r2 min.                       | 1,5 mm     |
| Size (mm)                     | 100x150x24 |
| Width (mm)                    | 24         |
| Bearing number                | 6020-N     |
| Bore Diameter (mm)            | 100        |
| Outer Diameter (mm)           | 150        |
| Basic dynamic load rating (C) | 60 kN      |
| Basic static load rating (C0) | 54 kN      |