


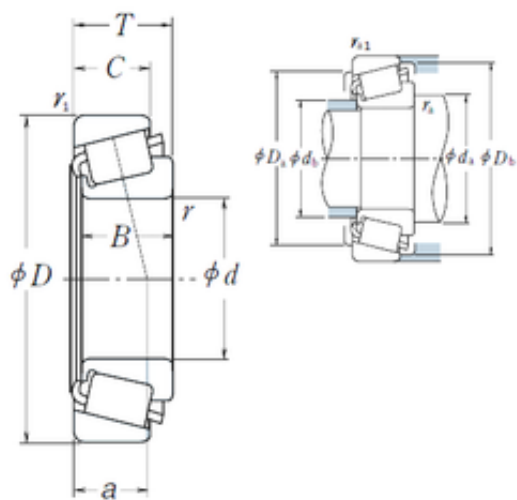

Bearing No. HH221442/HH221410

e	0.33
d	98,425 mm
D	190,5 mm
T	57,15 mm
B	57,531 mm
C	46,038 mm
a	42,3 mm
Da	171 mm
B_	57.531
Db	179 mm
da	119 mm
Y0	0.99
db	113 mm
C0	520
D_	190.5
Z_	15
C_	46.038
Y1	1.8
DE_	168.277
SLR	43
D_a	171
DI_	121.995
DA1	24.929
DA2	22.314
CUP	2.24
DA_	23.628
D_b	179
RAr	408.178
SDM_	145.354
KBRG	3161

yobi	HH221442/HH221410
CONE	4.81
ALP21	25
ALP22	10
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	30
r min.	3,5 mm
LangID	1
Weight	7,05 Kg
ALPHA_	12.583
r1 min.	3,3 mm
ra max.	3,5 mm
Oil rpm	2600
outer r	3.3
hidYobi	HH221442/HH221410
GRS rpm	1900
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	98.425x190.5x57.15
SHOG_yobi	HH221442/HH221410
Prod_Type3	TRBSR_ID_A
Width (mm)	57,15
Bearing number	HH221442/HH221410
Bore Diameter (mm)	98,425
Outer Diameter (mm)	190,5
Calculation factor (e)	0,33

(Oil) Lubrication Speed	2600 r/min
Calculation factor (Y0)	0,99
(Grease) Lubrication Speed	1900 r/min
Basic static load rating (C0)	520 kN
Basic dynamic load rating (C)	390 kN