


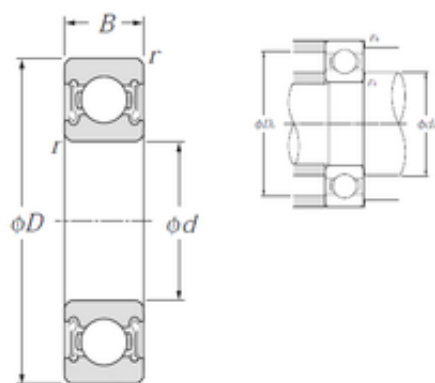

Bearing No. 6020LLB

C	24 mm
d	100 mm
D	150 mm
B	24 mm
Bore	3.937 Inch 100 Millimeter
Noun	Bearing
Weight	1,15 Kg
r min.	1,5 mm
da max	110 mm
UNSPSC	31171504
da min.	108 mm
Da max.	142 mm
ra max.	1,5 mm
Category	Single Row Ball Bearing
Size (mm)	100x150x24
Snap Ring	No
Inventory	0.0
Enclosure	2 Seals
Width (mm)	24
bore type:	Round
Weight / LBS	2.7778
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	100 mm
Keyword String	Ball
overall width:	24 mm
cage material:	Steel

fillet radius:	1.5 mm
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal
Bearing number	6020LLB
Enclosure Type	Non-Contact Seal
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.945 Inch 24 Millimeter
Long Description	100MM Bore; 150MM Outside Diameter; 24MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	5.906 Inch 150 Millimeter
Manufacturer Name	NTN
outside diameter:	150 mm
Weight / Kilogram	0
bearing material:	High Carbon Chrome Steel
inner ring width:	24 mm
outer ring width:	24 mm
precision rating:	ISO Class 0
Bore Diameter (mm)	100
Internal Clearance	C0-Medium
Outer Diameter (mm)	150

internal clearance:	CN
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
static load capacity:	54000 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	4200 rpm
dynamic load capacity:	60000 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6020LLB
Internal Special Features	No
manufacturer product page:	Click here
(Grease) Lubrication Speed	4 200 r/min
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	60 kN
Basic static load rating (C0)	54 kN
Maximum Capacity / Filling Slot	No