


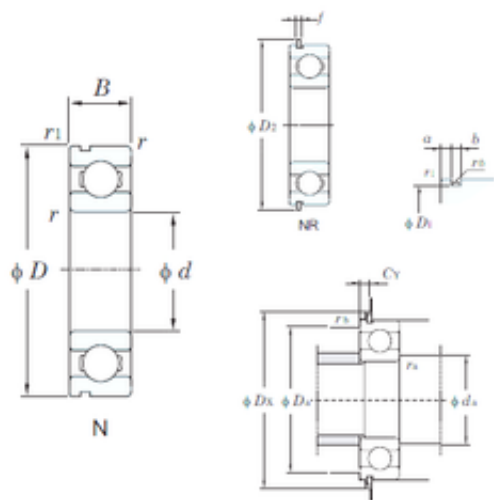

Bearing No. 6020NR

f	2,77 mm
d	100 mm
D	150 mm
B	24 mm
C	24 mm
a	3,71 mm
b	3,25 mm
Cr	75.2
f0	15.9
Cu	2.70
D2	159,7 mm
D1	145,24 mm
C0r	54.2
Bore	3.937 Inch 100 Millimeter
Noun	Bearing
r min.	1,5 mm
r(min)	1.5
UNSPSC	31171504
Weight	1,25 Kg
r1(min)	0.5
da(min)	108
D2(min)	159.7
Da(max)	142
rb(max)	0.5
ra(max)	1.5
Dx(min)	162
r0 max.	0,6 mm
r1 min.	0,5 mm
da min.	108 mm

Cy(max)	6.17
Da max.	142 mm
Category	Single Row Ball Bearing
Oil lub.	5100
Snap Ring	Yes
Size (mm)	100x150x24
Inventory	0.0
Enclosure	Open
Width (mm)	24
Grease lub.	4300
f{0.05)	2.77
Bearing No.	6020NR
Weight / LBS	2.75578
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6020NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Long Description	100MM Bore; 150MM Outside Diameter; 24MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
(Refer.)Mass(kg)	1.25
Inner Race Width	0 Inch 0 Millimeter

Outside Diameter	5.906 Inch 150 Millimeter
Outer Race Width	0.945 Inch 24 Millimeter
Weight / Kilogram	1.359
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	100
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	5100 r/min
Internal Special Features	No
(Grease) Lubrication Speed	4300 r/min
Basic static load rating (C0)	54,2 kN
Basic dynamic load rating (C)	60,2 kN
Maximum Capacity / Filling Slot	No