


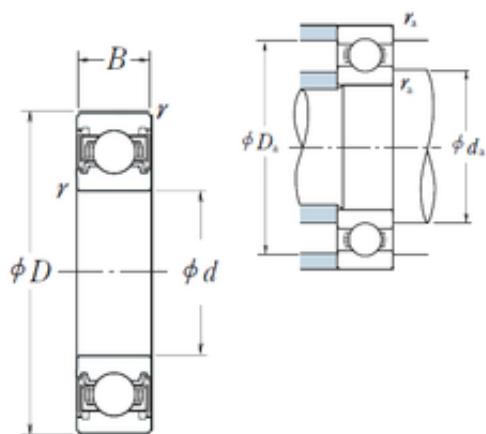

Bearing No. 6020VV

D	150 mm
d	100 mm
B	24 mm
C	24 mm
r	1.5
Z_	15
B_	24
D_	150
ra	1.5
C0	54
fo	15.9
DI_	109.919
SRI	7.8
D_a	142
DE_	140.081
DA_	15.081
SRE	7.8
SRIN	-0.03
SBRG	10
yobi	6020VV
SDM_	125
SREX	0.03
KBRG	6151
bomp	0
mass	1.29
Bore	3.937 Inch 100 Millimeter
SRIX	0.03
SREN	-0.03
Noun	Bearing

ALPHA_	0
da min	108
LangID	1
r min.	1,5 mm
UNSPSC	31171504
da max	112,5 mm
C_conv	60000
Weight	1,29 Kg
ra max.	1,5 mm
hidYobi	6020VV
GRS rpm	4300
da min.	108 mm
Da max.	142 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	100x150x24
Enclosure	2 Seals
Inventory	0.0
Width (mm)	24
Prod_Type3	DGBB_SR_VV
Weight / LBS	1.24
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	6020VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.945 Inch 24 Millimeter
Outside Diameter	5.906 Inch 150

	Millimeter
Long Description	100MM Bore; 150MM Outside Diameter; 24MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.455
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	100
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6020VV
Internal Special Features	No
(Grease) Lubrication Speed	4 300 r/min
Basic static load rating (C0)	54 kN
Basic dynamic load rating (C)	60 kN
Maximum Capacity / Filling Slot	No