


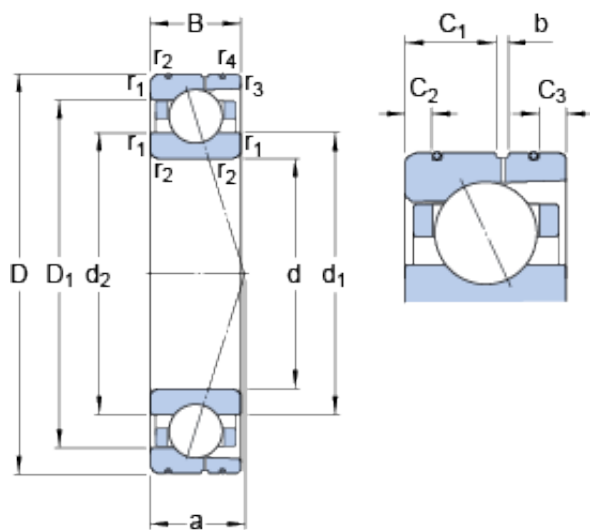

Bearing No. 7011 CD/HCP4AL

b	2.4 mm
d	55 mm
a	18.8 mm
B	18 mm
D	90 mm
Ball - z	18
Size (mm)	90x55x18
Width (mm)	18
Mass bearing	0.32 kg
d ₂	65.8 mm
D ₁	79.2 mm
d _n	68.1 mm
C ₁	9 mm
C ₂	4.3 mm
C ₃	3.8 mm
C ₂	4.3 mm
C ₁	9 mm
d _n	68.1 mm
D ₁	79.2 mm
d ₂	65.8 mm
d ₁	65.8 mm
d ₁	65.8 mm
C ₃	3.8 mm
Bearing number	7011 CD/HCP4AL
Preload class B	102 N/micron
G _{ref}	5.1 cm3
Preload class C	143 N/micron
Preload class D	207 N/micron
Preload class A	75 N/micron

Number of balls z	18
d_a min.	61 mm
D_a max.	84 mm
d_b min.	61 mm
D_b max.	86.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Bore Diameter (mm)	90
Outer Diameter (mm)	55
$r_{1,2}$ min.	1.1 mm
d_a - min.	61 mm
d_b - min.	61 mm
D_a - max.	84 mm
Calculation factor f	1.1
r_b - max.	0.6 mm
$r_{3,4}$ min.	0.6 mm
D_b - max.	86.8 mm
Ball - D_w	11.112 mm
r_a - max.	1 mm
Calculation factor - f	1.1
$r_{3,4}$ - min.	0.6 mm
$r_{1,2}$ - min.	1.1 mm
Ball diameter D_w	11.112 mm
Basic dynamic load rating C	39.7 kN
Preload class B G_B	300 N
Preload class A G_A	150 N
Preload class D G_D	1200 N
Preload class C G_C	600 N
Basic dynamic load rating - C	39.7 kN
Preload class B - G_B	300 N

Preload class C - G_C	600 N
Preload class D - G_D	1200 N
Preload class A - G_A	150 N
Calculation factor f_1	1
Calculation factor f_0	15.1
Fatigue load limit P_u	1.37 kN
Calculation factor f_{HC}	1.02
Calculation factor f_{2D}	1.09
Calculation factor f_{2B}	1.02
Calculation factor f_{2A}	1
Calculation factor - f	1
Calculation factor f_{2C}	1.05
Fatigue load limit - P_u	1.4 kN
Limiting speed for oil lubrication	28000 mm/min
Calculation factor - f_0	15.1
Calculation factor - f_{HC}	1.02
Calculation factor - f_{2A}	1
Calculation factor - f_{2D}	1.09
Calculation factor - f_{2B}	1.02
Calculation factor - f_{2C}	1.05
Limiting speed for grease lubrication	18000 r/min
Basic static load rating C_0	32.5 kN
Static axial stiffness, preload class B	102 N/ μ m
Static axial stiffness, preload class A	75 N/ μ m
Static axial stiffness, preload class C	143 N/ μ m
Static axial stiffness,	207 N/ μ m

preload class D	
Attainable speed for grease lubrication	18000 r/min
Basic static load rating - C_0	32.5 kN
Attainable speed for oil-air lubrication	28000 r/min
Reference grease quantity G_{ref}	5.1 cm ³