


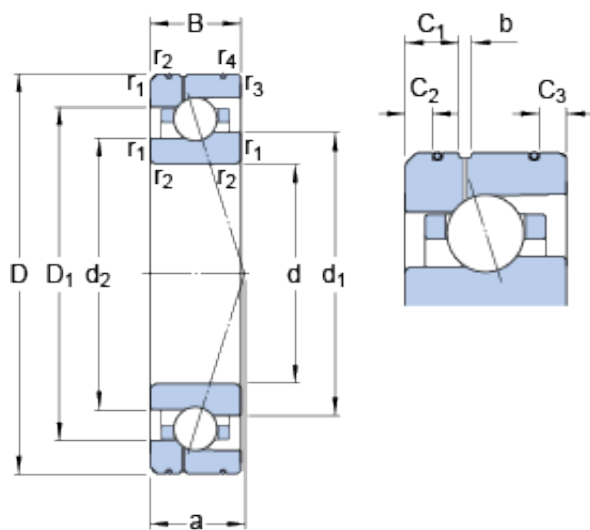

Bearing No. 7011 CE/P4AL1

b	1.6 mm
d	55 mm
a	18.8 mm
B	18 mm
D	90 mm
Ball - z	24
Size (mm)	90x55x18
Width (mm)	18
Mass bearing	0.39 kg
d ₂	65.6 mm
D ₁	77.25 mm
d _n	69.6 mm
C ₁	5.65 mm
C ₂	3.4 mm
C ₃	3.4 mm
C ₂	3.4 mm
C ₁	5.65 mm
d _n	69.6 mm
D ₁	77.25 mm
d ₂	65.6 mm
d ₁	67.73 mm
d ₁	67.73 mm
C ₃	3.4 mm
Bearing number	7011 CE/P4AL1
Preload class B	72 N/micron
G _{ref}	5 cm3
Preload class C	98 N/micron
Preload class A	46 N/micron
Number of balls z	24

d_a min.	61 mm
d_b min.	61 mm
D_a max.	84 mm
D_b max.	85.8 mm
r_a max.	1 mm
r_b max.	0.6 mm
Bore Diameter (mm)	90
Outer Diameter (mm)	55
$r_{1,2}$ min.	1.1 mm
d_a - min.	61 mm
d_b - min.	61 mm
D_a - max.	84 mm
Calculation factor f	1.07
r_b - max.	0.6 mm
$r_{3,4}$ min.	0.6 mm
r_a - max.	1 mm
D_b - max.	85.8 mm
Ball - D_w	7.938 mm
$r_{3,4}$ - min.	0.6 mm
$r_{1,2}$ - min.	1.1 mm
Calculation factor - f	1.07
Ball diameter D_w	7.938 mm
Basic dynamic load rating C	16.8 kN
Preload class B G_B	270 N
Preload class C G_C	540 N
Preload class A G_A	90 N
Basic dynamic load rating - C	16.8 kN
Preload class A - G_A	90 N
Preload class B - G_B	270 N
Preload class C - G_C	540 N

Calculation factor f_1	1
Calculation factor f_0	8.4
Fatigue load limit P_u	0.52 kN
Calculation factor f_{2C}	1.05
Calculation factor f_{2B}	1.03
Calculation factor - f	1
Calculation factor f_{2A}	1
Calculation factor f_{HC}	1
Calculation factor - f_0	8.4
Limiting speed for oil lubrication	34000 mm/min
Fatigue load limit - P_u	0.52 kN
Calculation factor - f_{HC}	1
Calculation factor - f_{2B}	1.03
Calculation factor - f_{2A}	1
Calculation factor - f_{2C}	1.05
Limiting speed for grease lubrication	22000 r/min
Basic static load rating C_0	12.2 kN
Static axial stiffness, preload class A	46 N/ μ m
Static axial stiffness, preload class B	72 N/ μ m
Static axial stiffness, preload class C	98 N/ μ m
Attainable speed for grease lubrication	22000 r/min
Basic static load rating - C_0	12.2 kN
Attainable speed for oil-air lubrication	34000 r/min
Reference grease quantity G_{ref}	5 cm ³

